

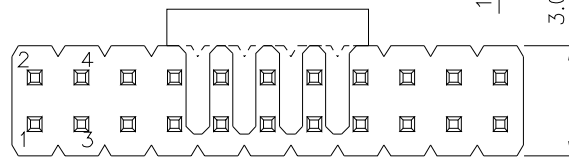
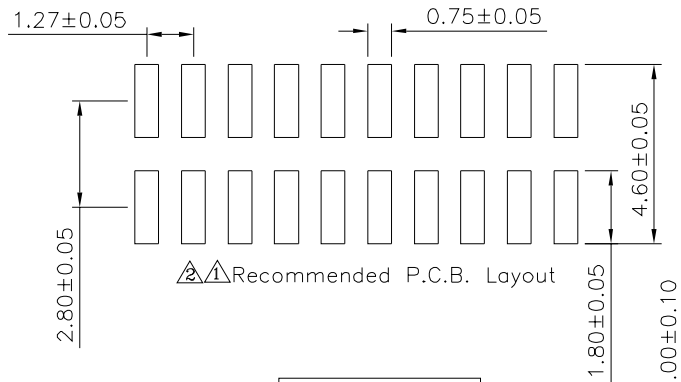


SPECIFICATION

Current Rating:1 Amp
 Dielectric Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

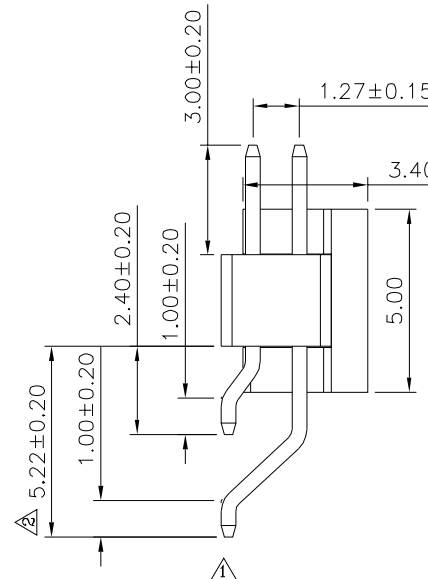

Odd Number Pin Cap

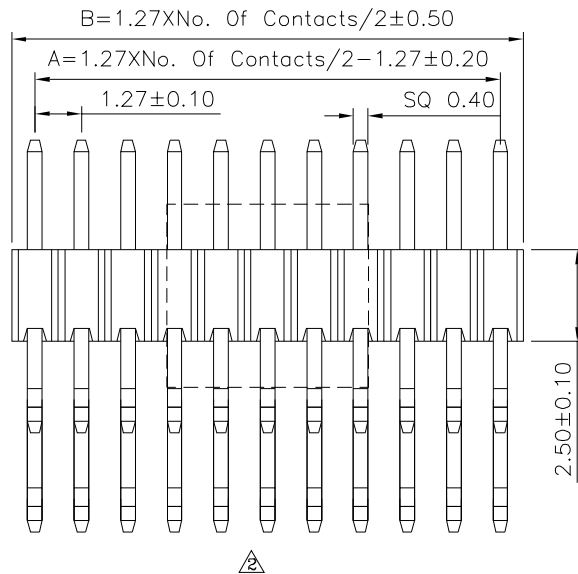

Pin	A	B	Pin	A	B
04	1.27	2.54	54	33.02	34.29
06	2.54	3.81	56	34.29	35.56
08	3.81	5.08	58	35.56	36.83
10	5.08	6.35	60	36.83	38.10
12	6.35	7.62	62	38.10	39.37
14	7.62	8.89	64	39.37	40.64
16	8.89	10.16	66	40.64	41.91
18	10.16	11.43	68	41.91	43.18
20	11.43	12.70	70	43.18	44.45
22	12.70	13.97	72	44.45	45.72
24	13.97	15.24	74	45.72	46.99
26	15.24	16.51	76	46.99	48.26
28	16.51	17.78	78	48.26	49.53
30	17.78	19.05	80	49.53	50.80
32	19.05	20.32	82	50.80	52.07
34	20.32	21.59	84	52.07	53.34
36	21.59	22.86	86	53.34	54.61
38	22.86	24.13	88	54.61	55.88
40	24.13	25.40	90	55.88	57.15
42	25.40	26.67	92	57.15	58.42
44	26.67	27.94	94	58.42	59.69
46	27.94	29.21	96	59.69	60.96
48	29.21	30.48	98	60.96	62.23
50	30.48	31.75	100	62.23	63.50
52	31.75	33.02			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

23059

APPROVED BY
 Jason Wu

CHECKED BY
 Leo Han

DRAWING BY
 Michelle Lee

SCALE

NONE


REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.30
 .XX ±0.20

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	02/21/2023
A1		Modify Data	HZF	07/05/2022
A0		NEW RELEASE	HZF	01/22/2015