




**SPECIFICATION**  
 Current Rating:1A  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

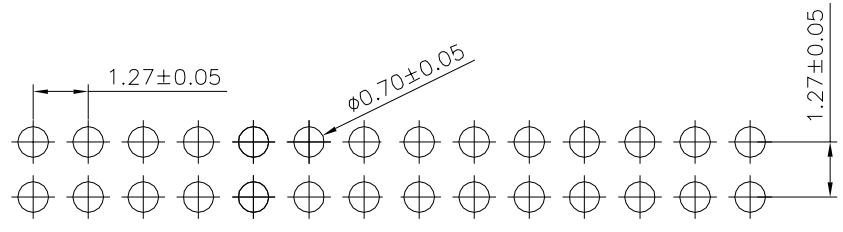


△ Recommended PCB Layout  
 PCB Board Tolerance±0.05

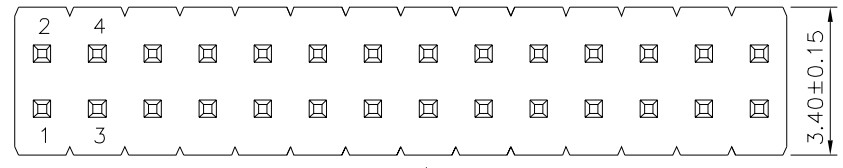

△

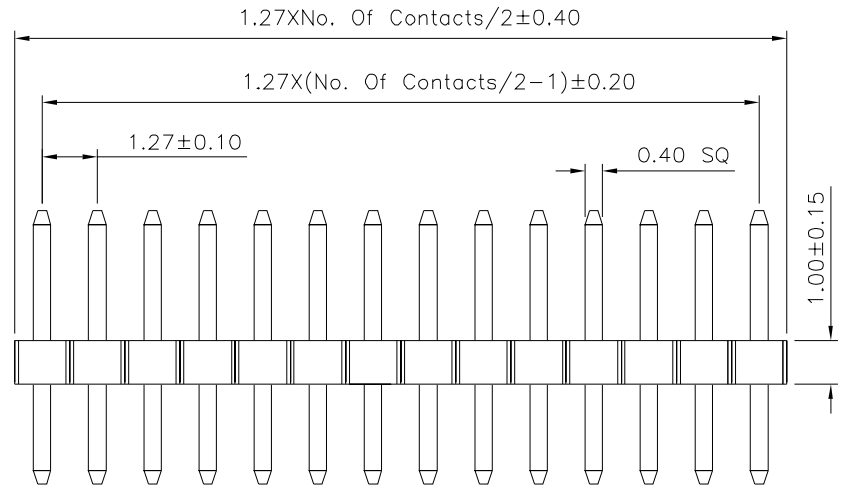

△ 100Pin Warpage:0.25mm Max.

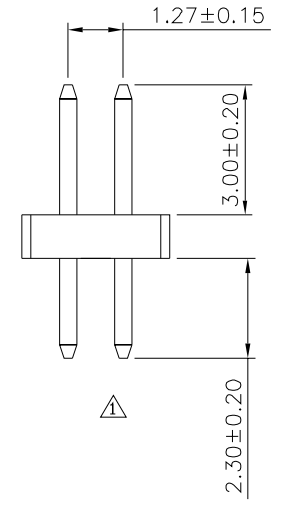

△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20
23075		Jason Wu		
		CHECKED BY		
		Leo Han		
		DRAWING BY		
		Michelle Lee		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/13/2026
△ A0		NEW RELEASE	HZF	02/25/2014