




SPECIFICATION
 Current Rating:1A
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

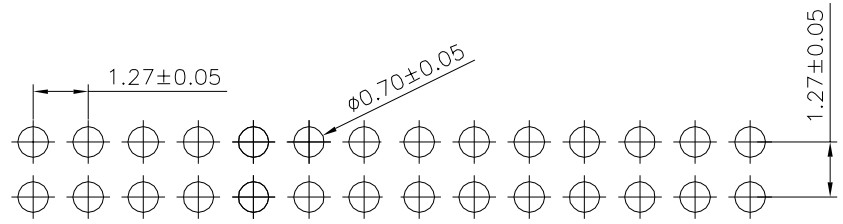


△ Recommended PCB Layout
 PCB Board Tolerance±0.05

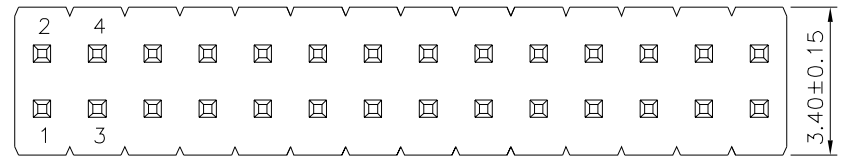

△

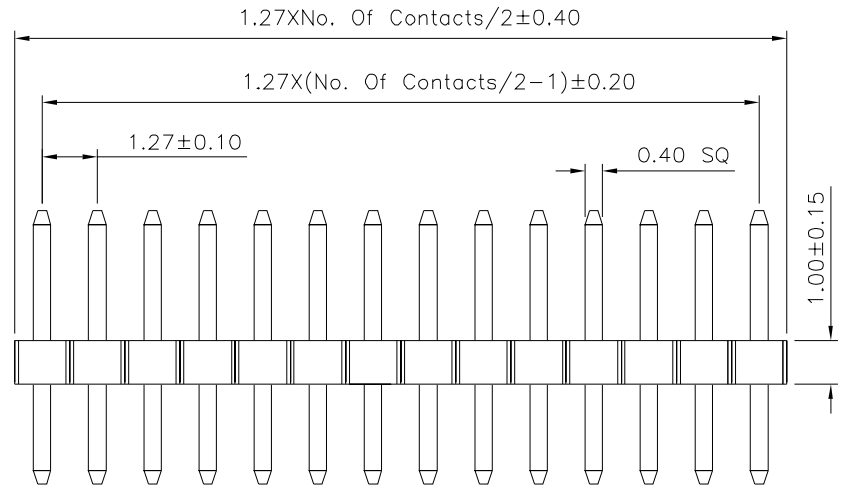

△ 100Pin Warpage:0.25mm Max.

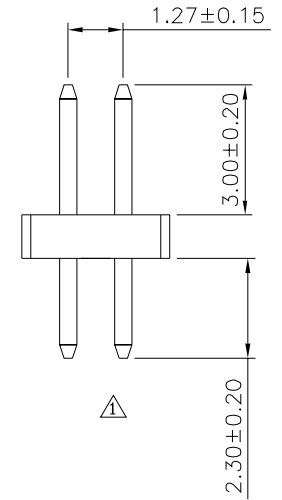

△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 23076

APPROVED BY Jason Wu
 CHECKED BY Leo Han
 DRAWING BY Michelle Lee

SCALE NONE

REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/13/2026
△ A0		NEW RELEASE	HZF	02/25/2014