File No. 555IH02806 SHEET 1/1

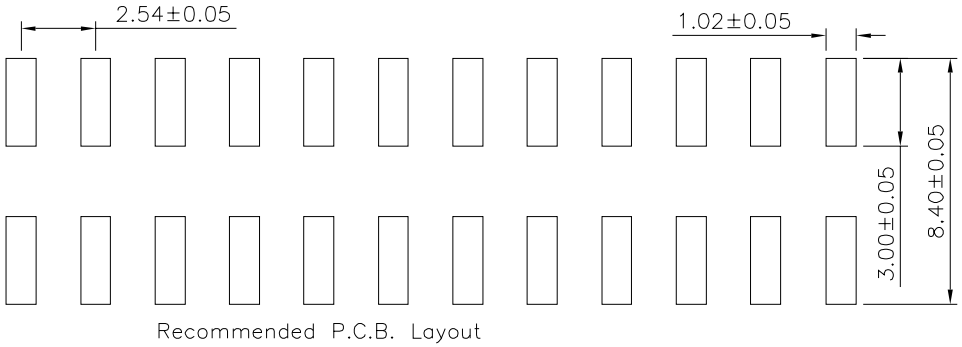

Recommended P.C.B. Layout

SPECIFICATION
Current Rating:3 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V−0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

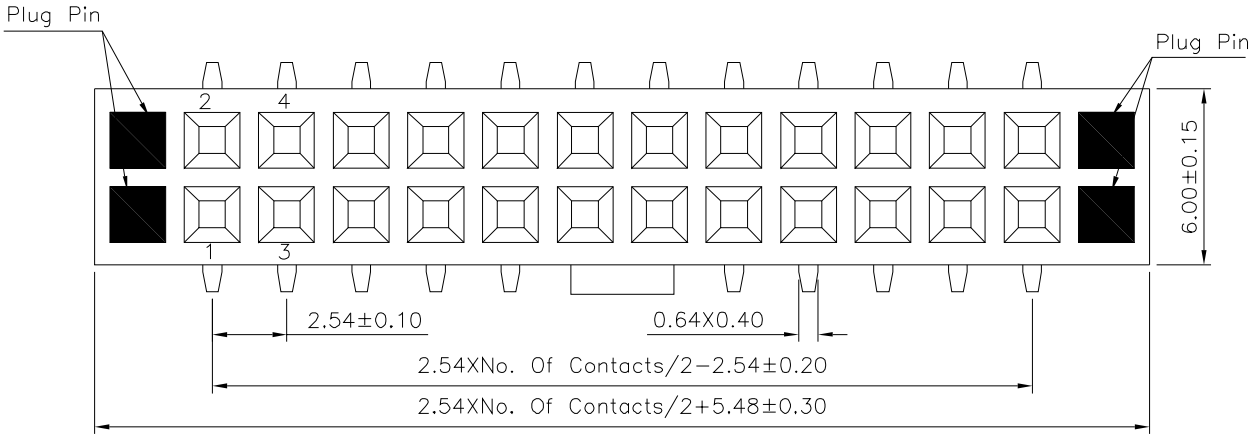

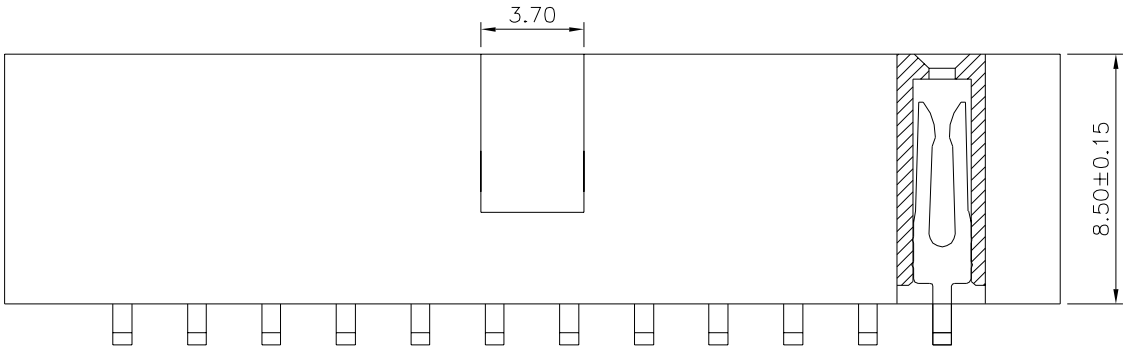



4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.	DRAWING No. 23122	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20		
		CHECKED BY HZF			
		DRAWING BY CYP			
	SCALE NONE	REV. A0	UNIT mm	NO. A0	NEW RELEASE HZF 02/02/2018
				REV.	REVISIONS CHK DATE