


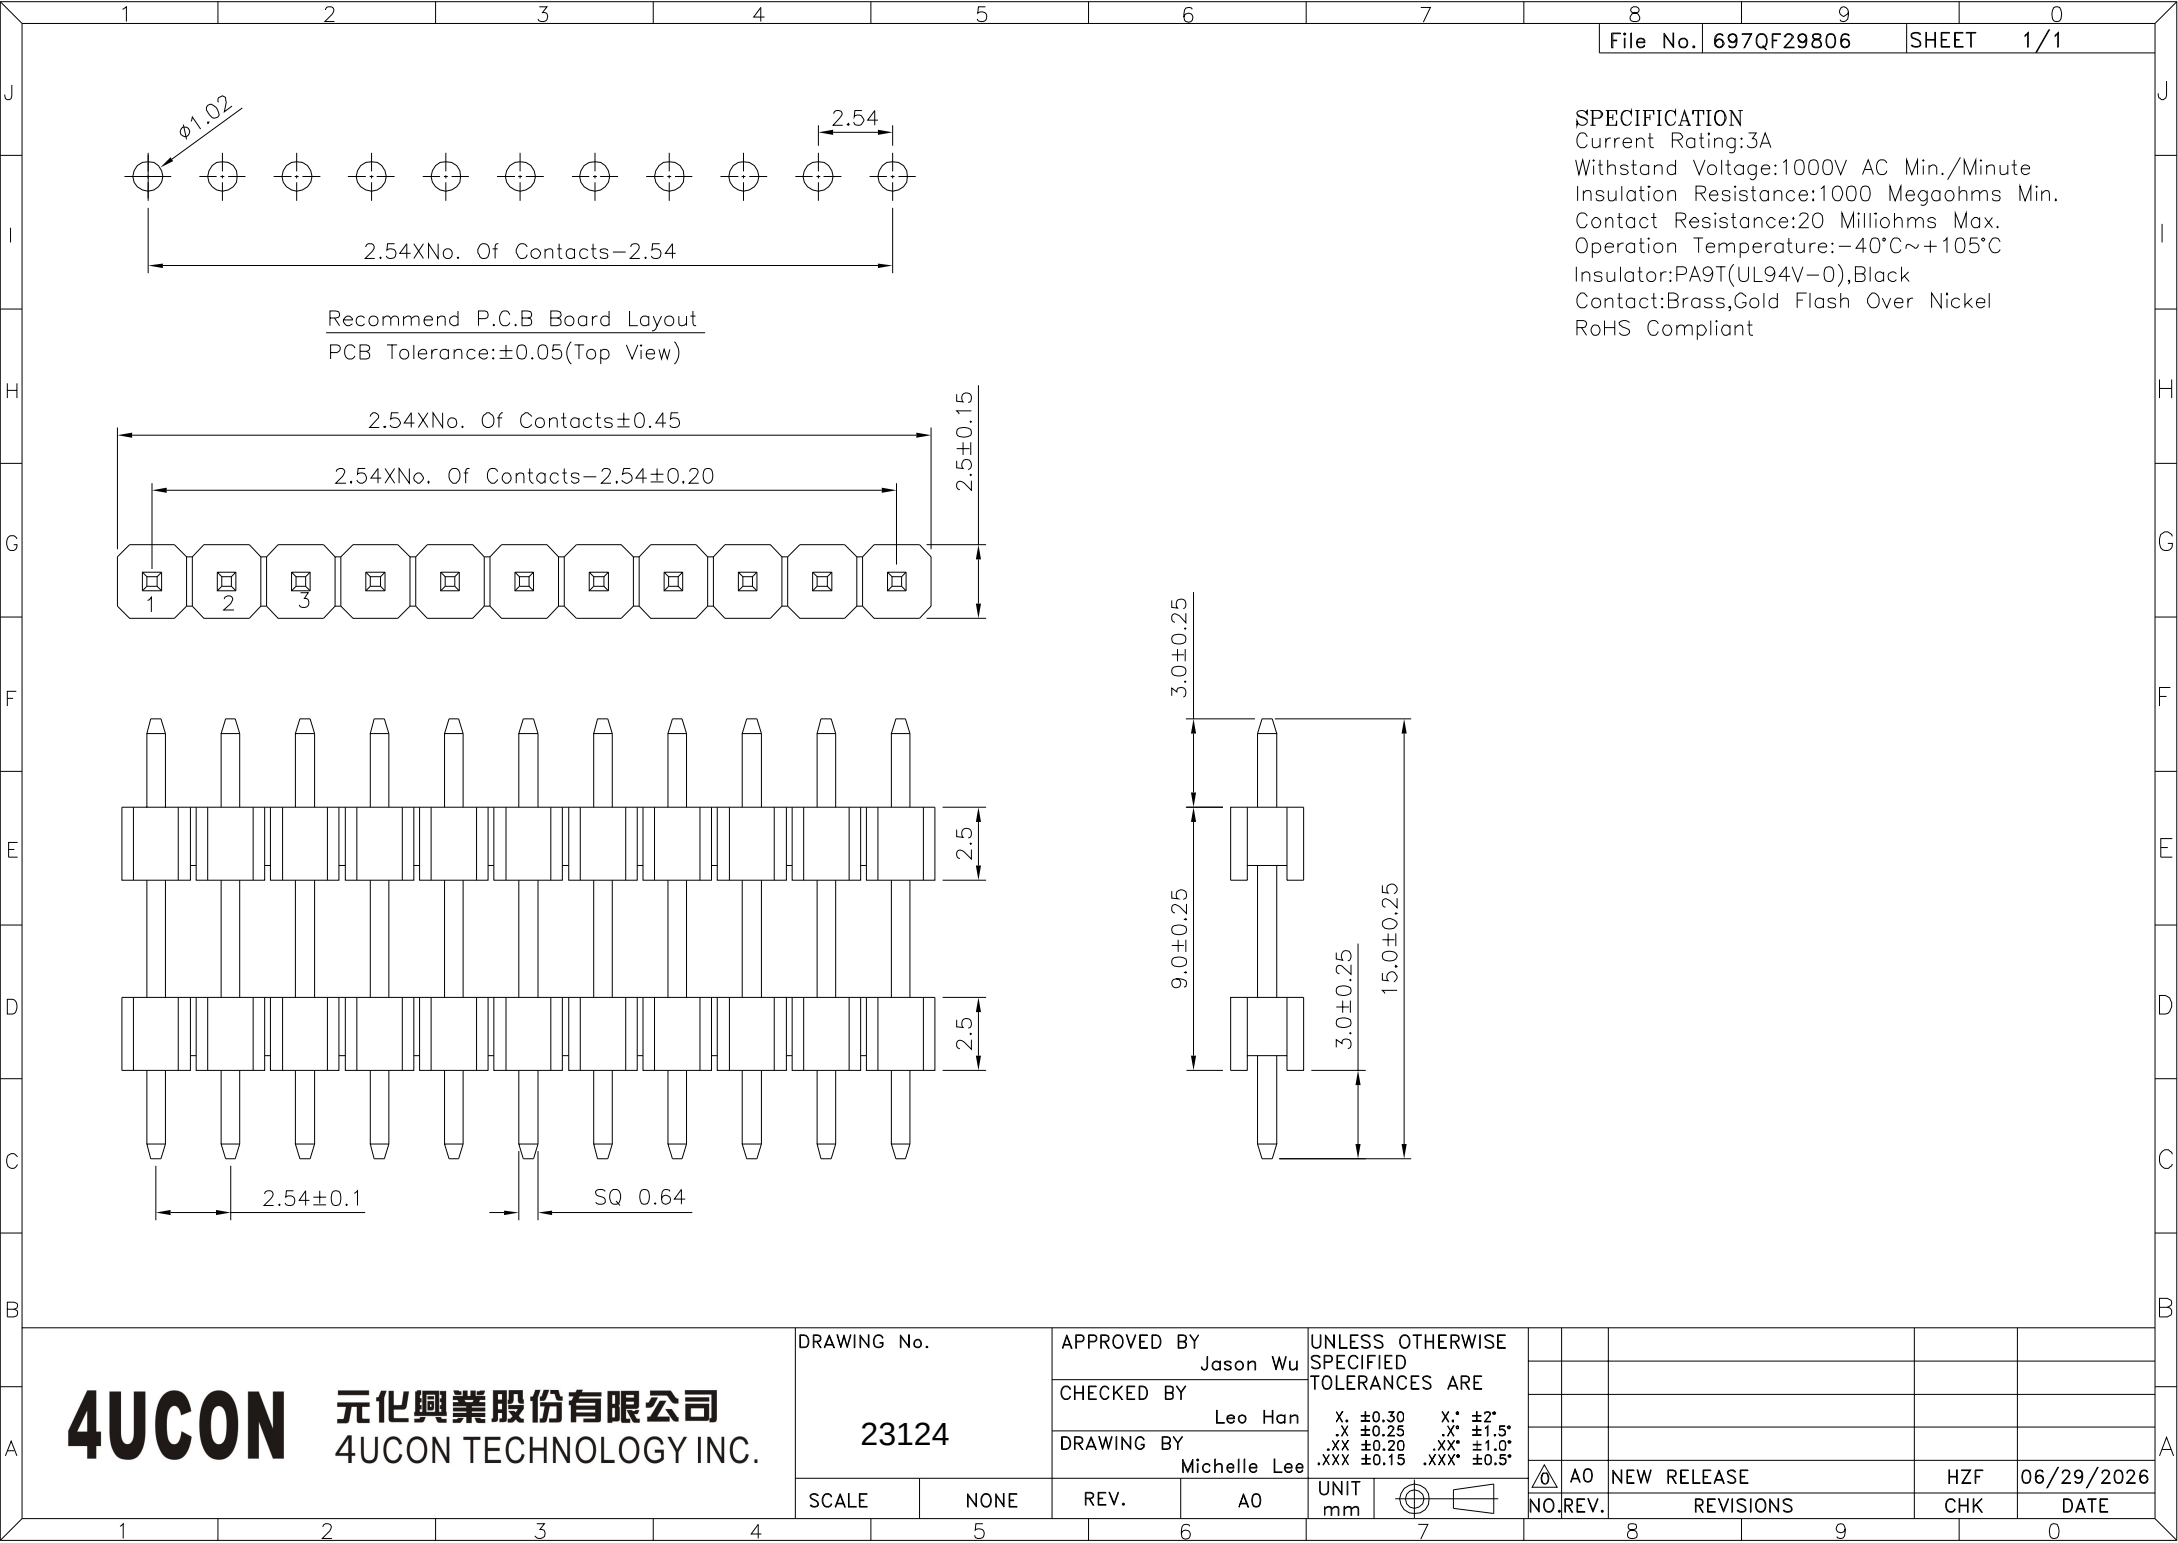

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 23124		APPROVED BY Jason Wu		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X." ±2° .X ±0.25 .X" ±1.5° .XX ±0.20 .XX" ±1.0° .XXX ±0.15 .XXX" ±0.5°						
		CHECKED BY Leo Han								
		DRAWING BY Michelle Lee								
SCALE	NONE	REV.	A0	UNIT mm			A0	NEW RELEASE	HZF	06/29/2026
						NO. REV.		REVISIONS	CHK	DATE