



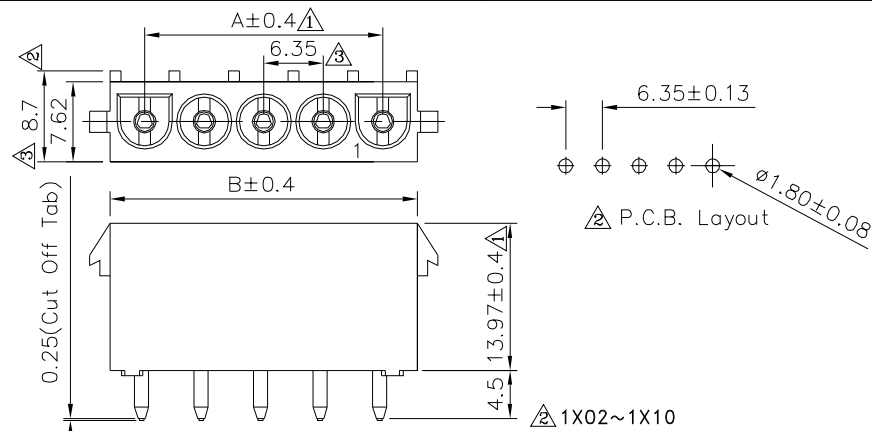


Circuit	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

SPECIFICATION

Current Rating: 13A(2~4P), 11A(6~15P)
 Voltage Rating: 600V
 Dielectric Withstanding Voltage: 5000V AC/Minute
 Ambient Temperature Rise: -55°C To +105°C
 Insulator: PA66, UL94V-0, White
 Contact: Phosphor Bronze, Tin Plated Over Nickel
 RoHS Compliant

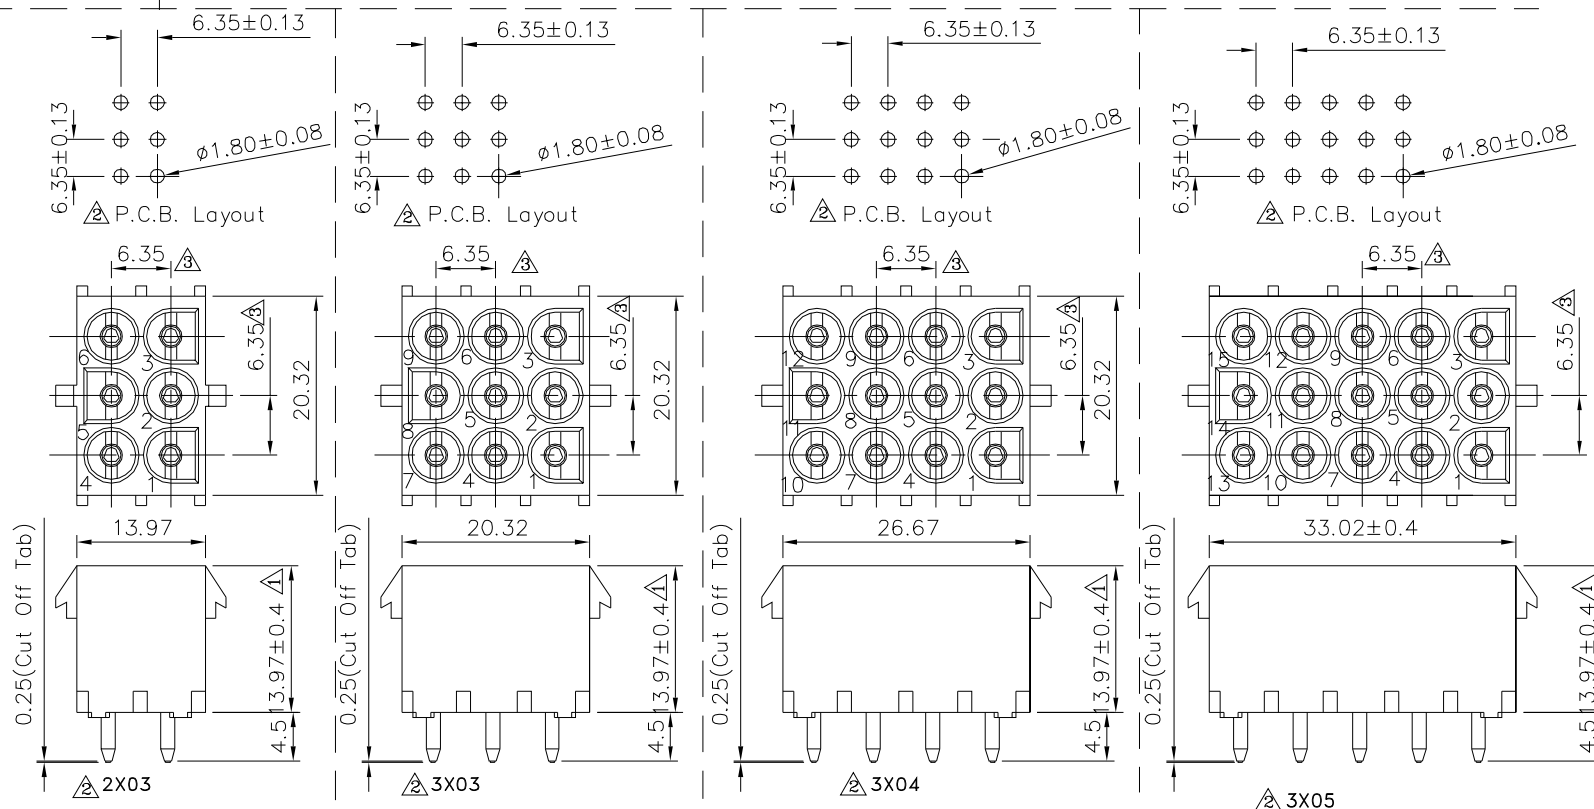

Contact	Item No.
2X03	23131

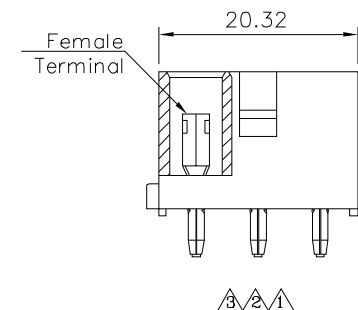

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 23131

APPROVED BY Jason Wu
 CHECKED BY Leo Han
 DRAWING BY Michelle Lee

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.4
 .XX ±0.25
 .XXX ±0.08

SCALE NONE REV. A3 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	07/17/2026
2	A2	Modify Data	HZF	03/08/2018
1	A1	Modify Data	HZF	12/17/2014
0	A0	NEW RELEASE	HZF	06/16/2009