
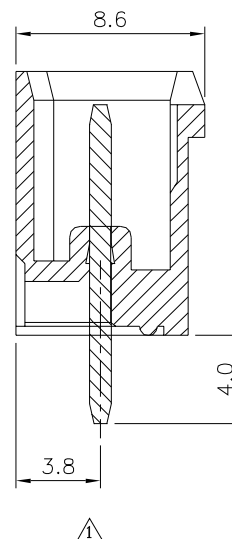
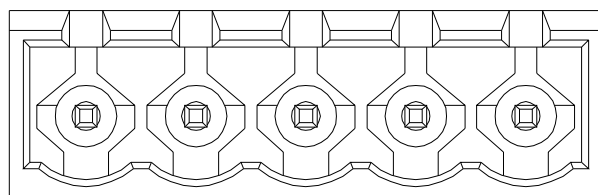


Recommended P.C.B. Layout

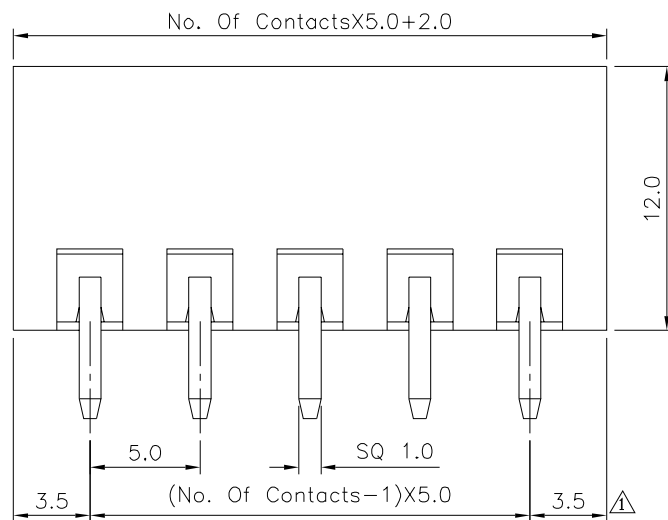

SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Operation Temperature:-40°C~+105°C
Soldering Reliability:+250°C,5 Seconds Max.
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

DRAWING No. 1/2

APPROVED BY
Jason Wu

CHECKED BY
Leo Han

DRAWING BY
Michelle Lee

23134

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X° ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	03/11/2015
1	A1	Modify Data	HZF	01/31/2012
0	A0	NEW RELEASE	HZF	06/27/2010

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.