


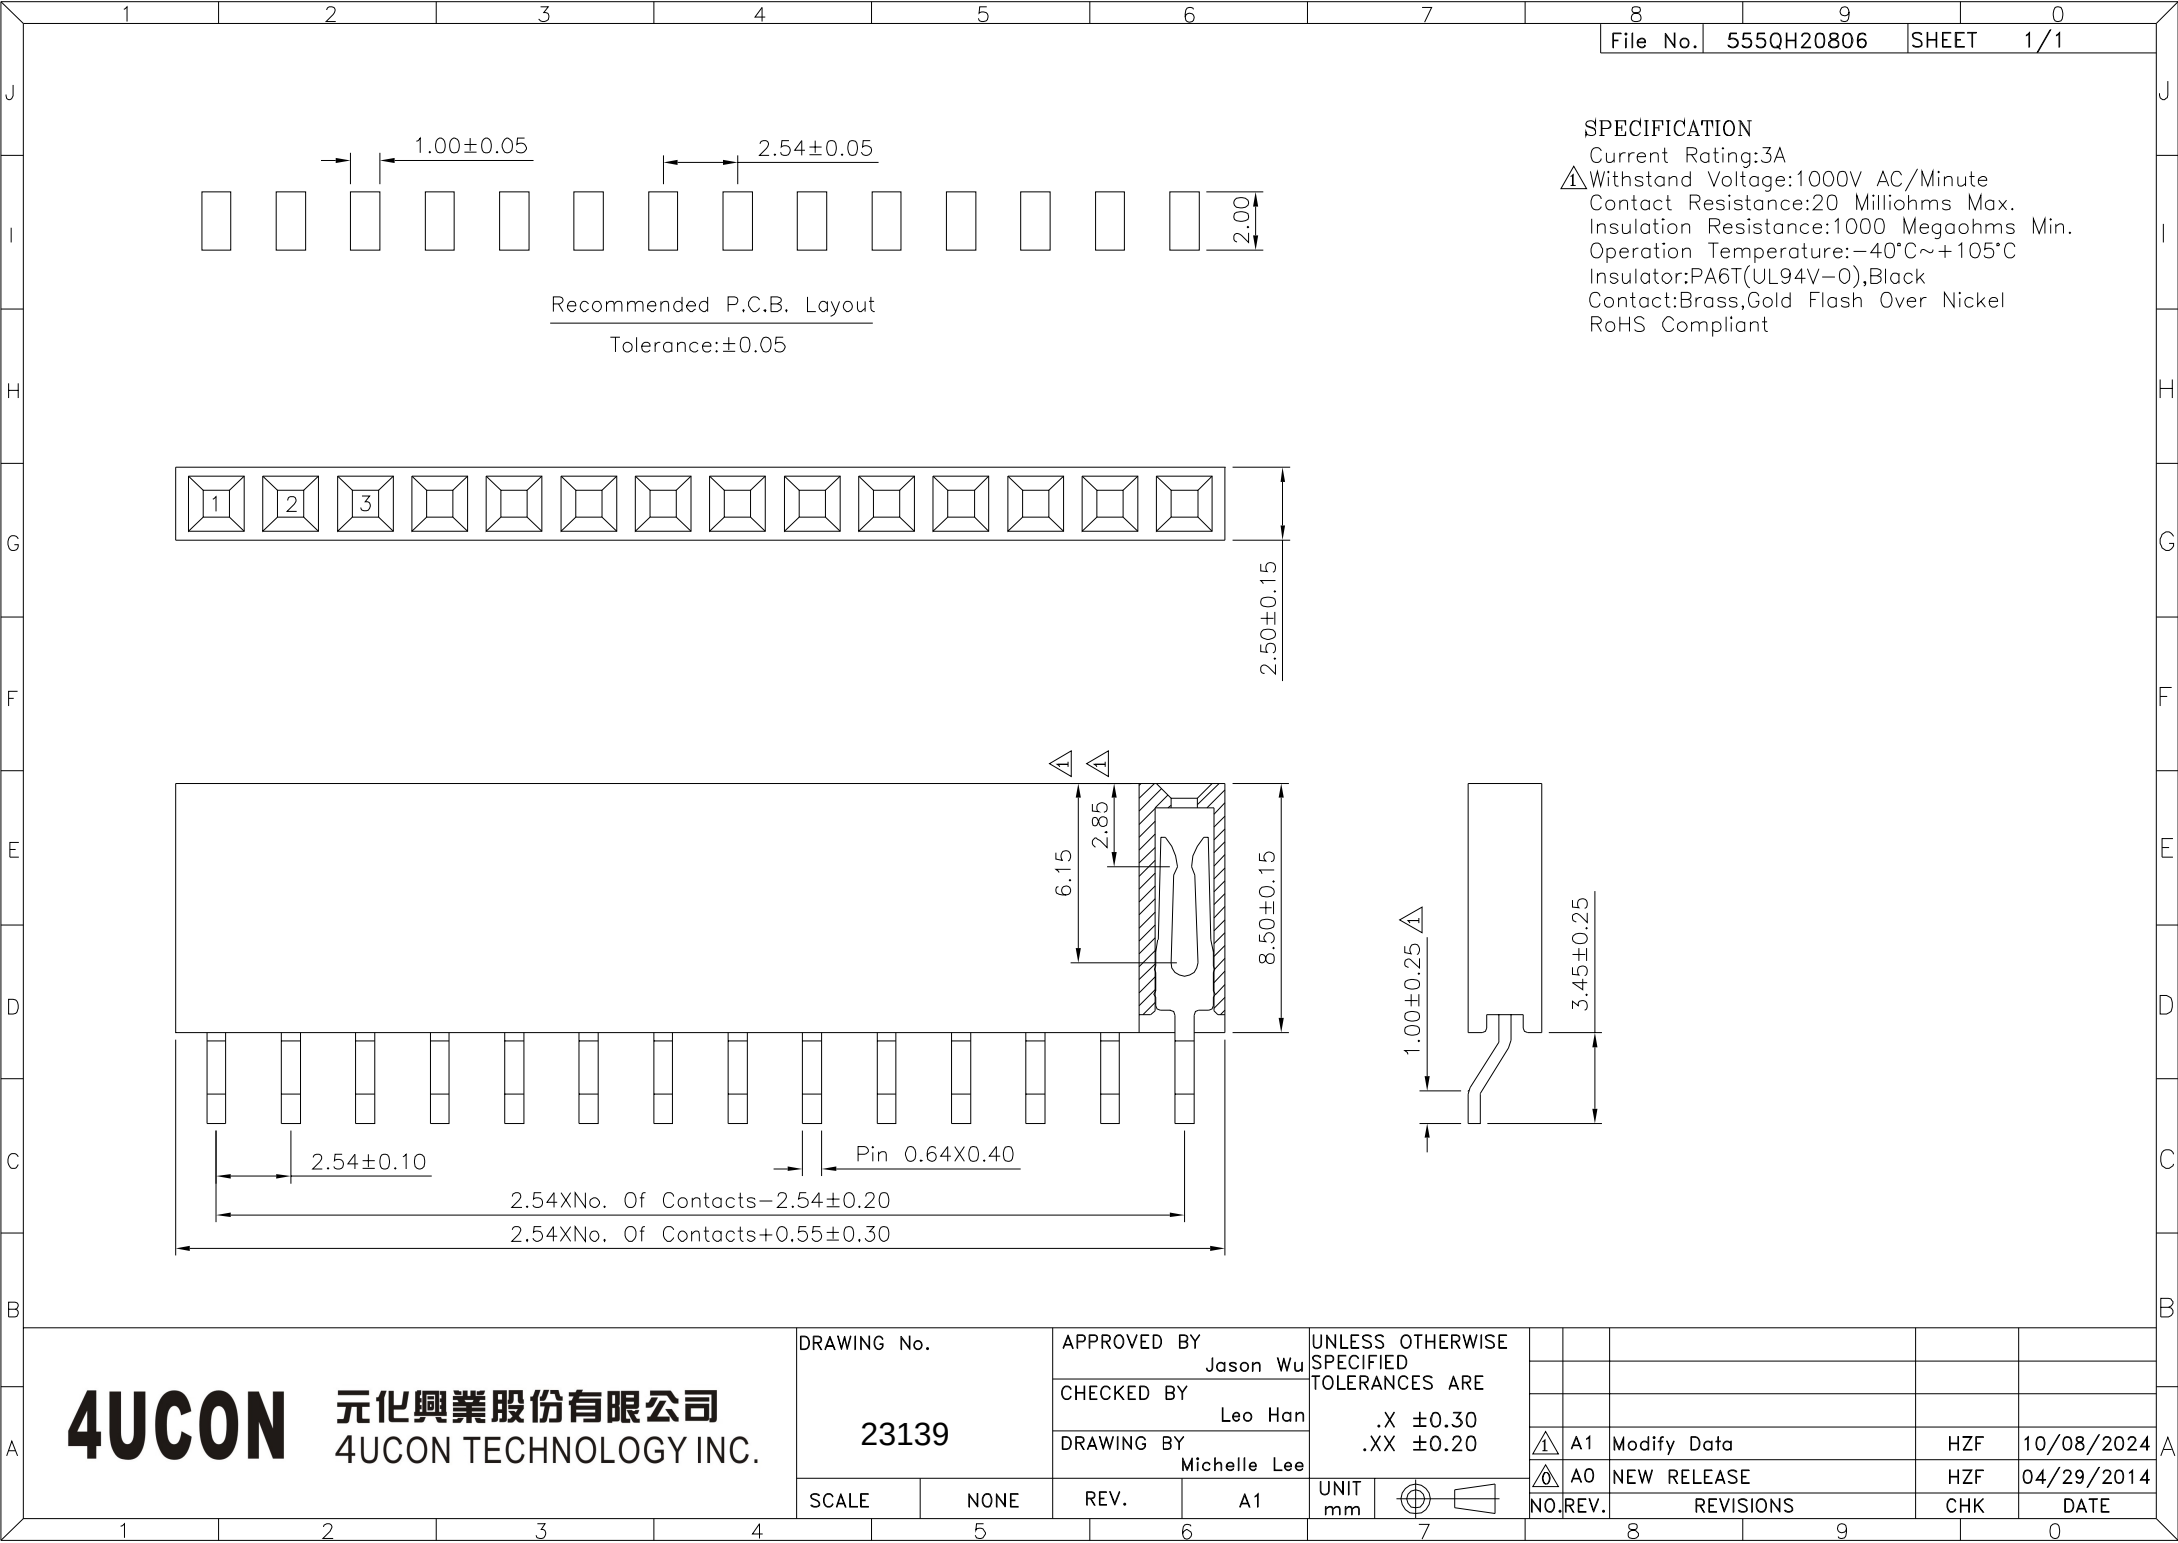

SPECIFICATION

Current Rating:3A
⚠ Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

23139

SCALE

NONE

REV.

A1

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY


Michelle Lee

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.30

.XX ± 0.20

UNIT
mm



NO.

REV.

A1

Modify Data

A0

NEW RELEASE

REVISIONS

CHK

DATE

HZF

10/08/2024

HZF

04/29/2014