



△ SPECIFICATION

Current Rating:1A AC/DC  
 Voltage Rating:50V AC/DC  
 Withstanding Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-0),Nature  
 RoHS Compliant



△△ Section:A-A

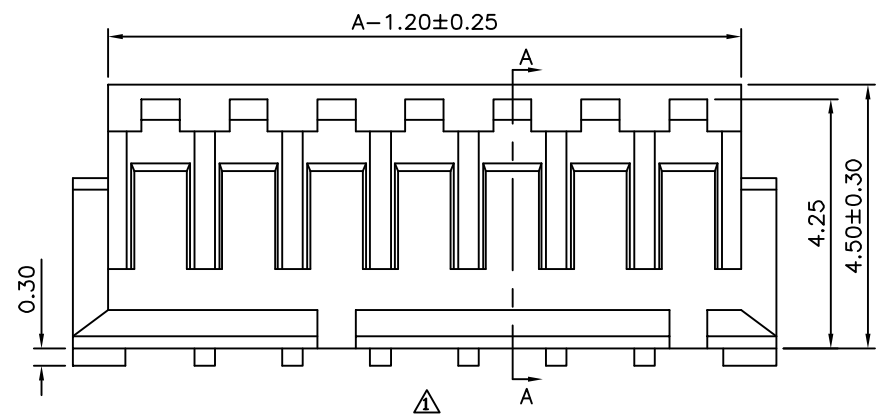

△

△△

Pin	A	B
02	4.50	1.50
03	6.00	3.00
04	7.50	4.50
05	9.00	6.00
06	10.5	7.50
07	12.00	9.00
08	13.50	10.50
09	15.00	12.00
10	16.50	13.50
11	18.00	15.00
12	19.50	16.50
13	21.00	18.00
14	22.50	19.50

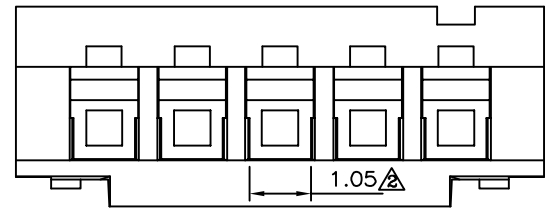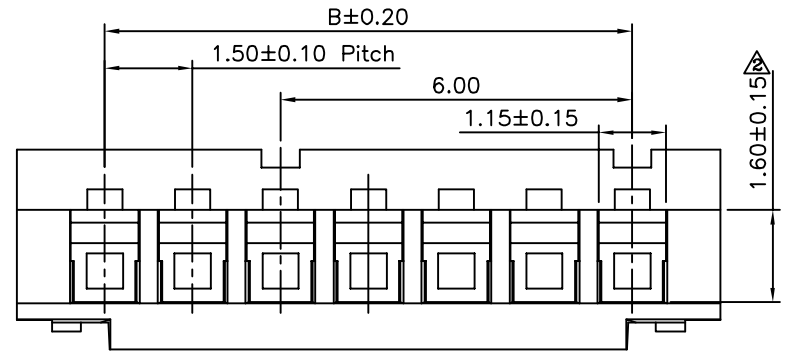

△ 06~14 Pin △

△ 02~05 Pin

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .XX ±0.25 .XXX ±0.20 .XX ±0.10 X ±1°
01300		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	03/07/2013
△	A1	Modify Data	HZF	05/28/2010
△	A0	NEW RELEASE	HZF	2004/10/07