


2 Prongs For Stranded Wire

**△ SPECIFICATION**  
 Rating: 250V AC Max. At 2 Amp  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 500 Megaohms Min.  
 At 1000V DC  
 Withstand Voltage: 1000V AC/Minute <0.5 Amps  
 Operation Temperature: -40°C ~ +125°C  
 Housing: PC(UL94V-2)  
 Contact: Phosphor Bronze  
 Gold Plated 6u" On Contact Area,  
 Gold Flash On Other Area, Over Nickel  
 Available For 24 Or 26 AWG Wire  
 RoHS Compliant

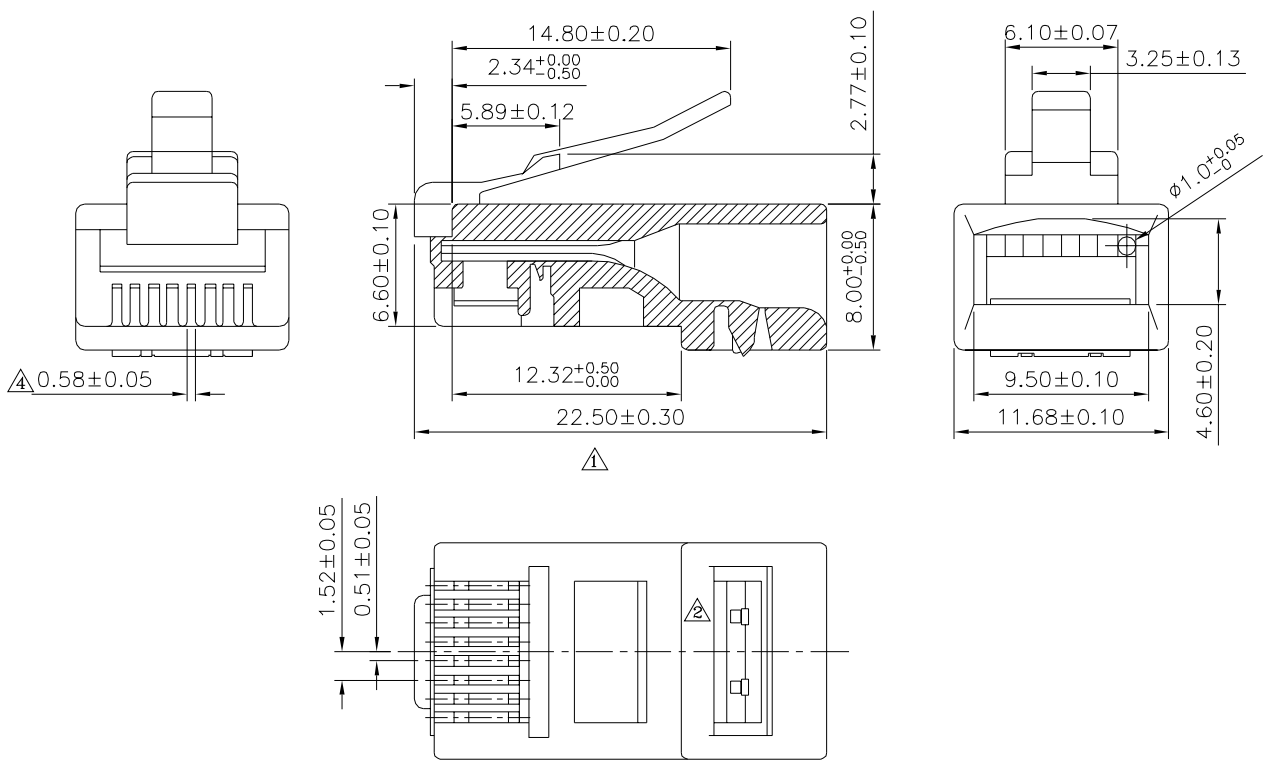

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. **04818**

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A4		Modify Data	HZF	05/16/2022
△ A3		Modify Data	HZF	10/25/2018
△ A2		Modify Data	HZF	03/20/2012
△ A1		Modify Data	HZF	05/19/2010
△ A0		NEW RELEASE	HZF	04/23/2007