

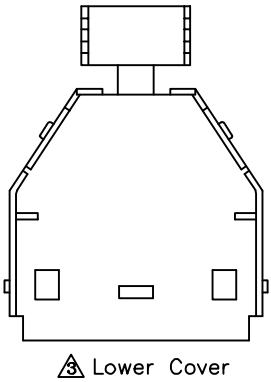
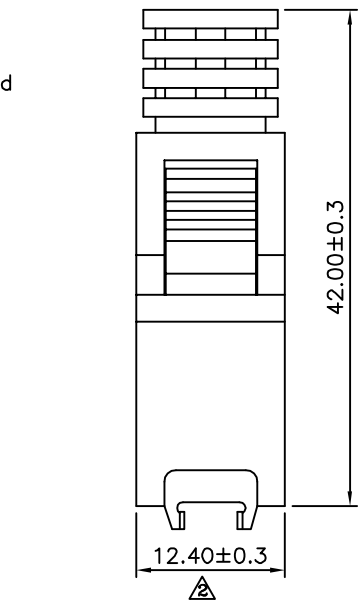


△ SPECIFICATION
 Current Rating:0.5 Amp
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:500 Megaohms Min.
 Operation Temperature:-55°C~+85°C
 Insulator:PBT(UL94V-0),Black
△ Hood/Latch Cover:ABS(UL94V-0)
 06080:Beige Color
 06081:Black Color
 Contact:Phosphor Bronze,Selective Gold Plated
 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 Latch:Stainless Steel
 Inner Shell:Steel,Nickel Plated Over Copper
 RoHS Compliant

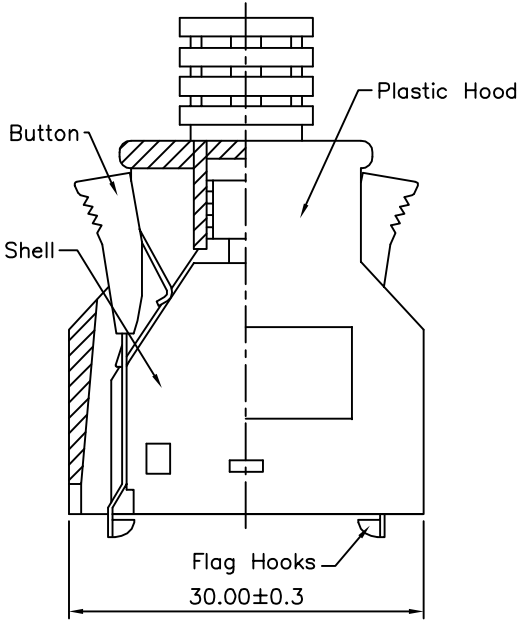

△ Lower Cover



△ Upper Cover

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 06080

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE REV. B3 UNIT mm

△ B3	Modify Data	HZF	11/17/2014
△ B2	Modify Data	HZF	03/15/2013
△ B1	Modify Data	HZF	12/06/2012
△ B0	NEW RELEASE	HZF	12/02/2009
NO. REV.	REVISIONS	CHK	DATE