

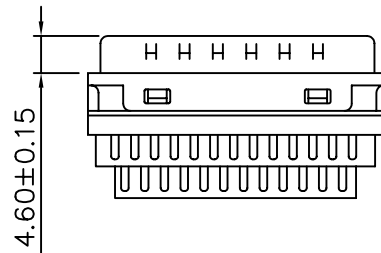


**SPECIFICATION**

Current Rating: 1A  
 Insulation Resistance : 500 Megohms/Min.  
 Withstanding Voltage : 500V AC/RMS For 1 Minute  
 Contact Resistance : 35 Milliohms Max.  
 Temperature Range : -55°C To +105°C  
 Housing :Thermoplasitc P.B.T UL 94V-0  
 Contact: Phosphor Bronze Gold Selective Plated  
 Shell : Steel,Nickel Plated Over Copper

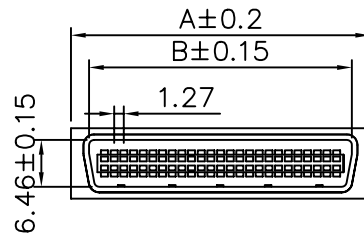

Circuits	A	B	C	D
14	16.45	12.80	8.50	16.40
20	20.00	16.60	9.30	15.20
26	24.00	20.40	9.30	15.50
36	30.40	26.70	8.50	15.20
50	39.30	35.60	9.30	15.50

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 06121

APPROVED BY  
 MEI  
 CHECKED BY  
 RAN  
 DRAWING BY  
 HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 .XXX

SCALE NONE

REV. A

UNIT mm



AREA

REVISIONS

CHK

DATE