
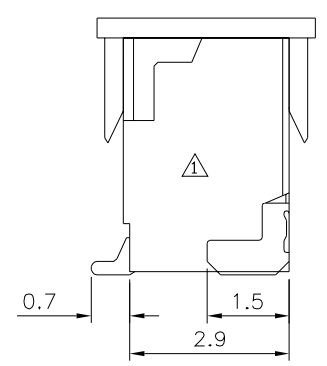
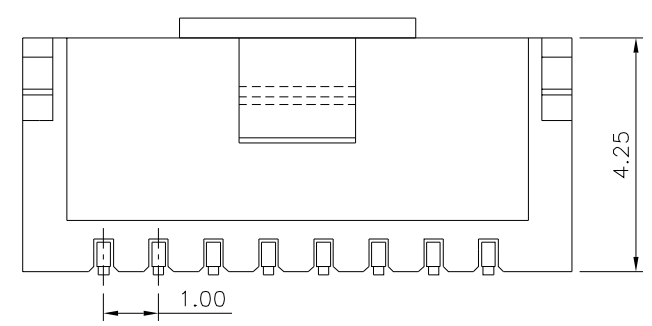


Recommended P.C.B. Layout

**SPECIFICATION**  
 Voltage Rating:50V AC  
 Current Rating:1.0A  
 Dielectric Withstanding Voltage:500V AC/1 Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Advise Work Condition:260°C Max. (Peak Temperature)  
 3 Sec. Or Less  
 Advise Work Time:120 Sec.~150 Sec.  
 Insulator:PA6T(UL94V-0),Nature  
 Contact:Phosphor Bronze,Tin Plated  
 RoHS Compliant

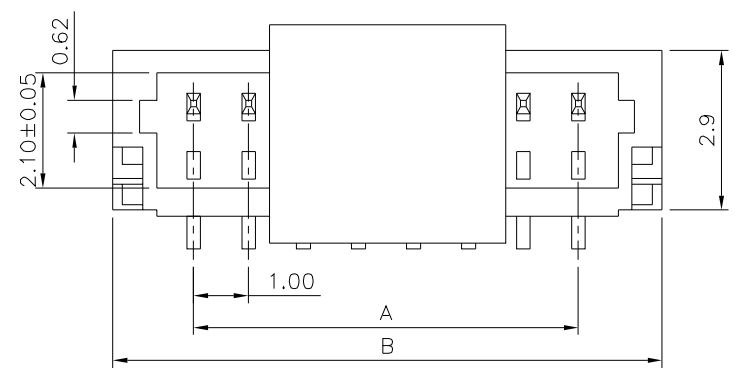

Poles	A	B
2	1.0	4.0
3	2.0	5.0
4	3.0	6.0
5	4.0	7.0
6	5.0	8.0
7	6.0	9.0
8	7.0	10.0
9	8.0	11.0
10	9.0	12.0
11	10.0	13.0
12	11.0	14.0
13	12.0	15.0
14	13.0	16.0
15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 07297  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY SONG  
 SCALE NONE REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.15  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
	A1	Modify Data	HZF	07/18/2014
	A0	NEW RELEASE	HZF	11/21/2009