
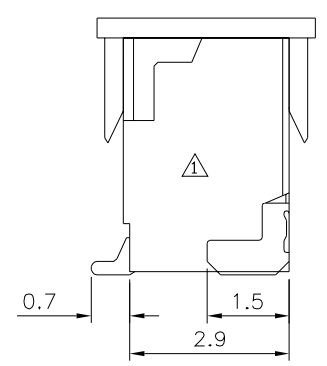
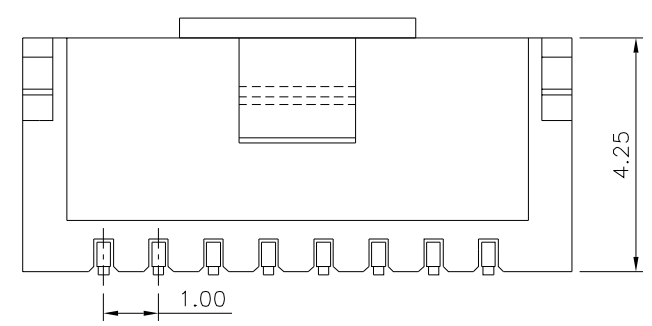


Recommended P.C.B. Layout

SPECIFICATION
 Voltage Rating:50V AC
 Current Rating:1.0A
 Dielectric Withstanding Voltage:500V AC/1 Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Advise Work Condition:260°C Max. (Peak Temperature)
 3 Sec. Or Less
 Advise Work Time:120 Sec.~150 Sec.
 Insulator:PA6T(UL94V-0),Nature
 Contact:Phosphor Bronze,Tin Plated
 RoHS Compliant

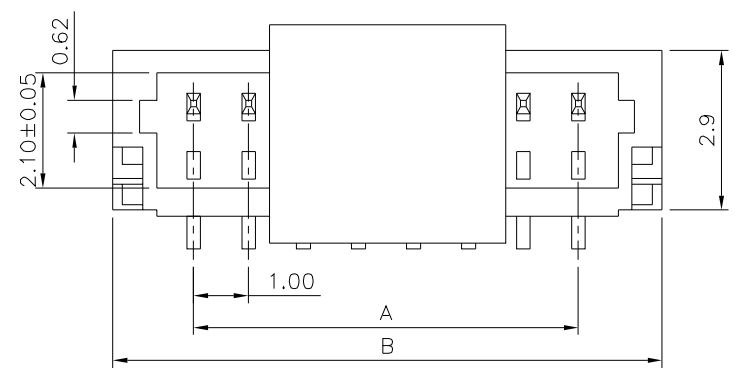

Poles	A	B
2	1.0	4.0
3	2.0	5.0
4	3.0	6.0
5	4.0	7.0
6	5.0	8.0
7	6.0	9.0
8	7.0	10.0
9	8.0	11.0
10	9.0	12.0
11	10.0	13.0
12	11.0	14.0
13	12.0	15.0
14	13.0	16.0
15	14.0	17.0
16	15.0	18.0
20	19.0	22.0

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 07305
 APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY SONG
 SCALE NONE REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
	A1	Modify Data	HZF	07/18/2014
	A0	NEW RELEASE	HZF	11/21/2009