


△ SPECIFICATION

Current Rating:1A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Withstand Voltage:500V AC/Minute  
 Temperature Range:-40°C~+105°C  
 ①Housing:PBT+G.F.(UL94V-0),Black  
 ②Contact:Phosphor Bronze,Gold Plated Over Nickel  
 ③Cover:PBT+G.F.(UL94V-0),Black  
 RoHS Compliant

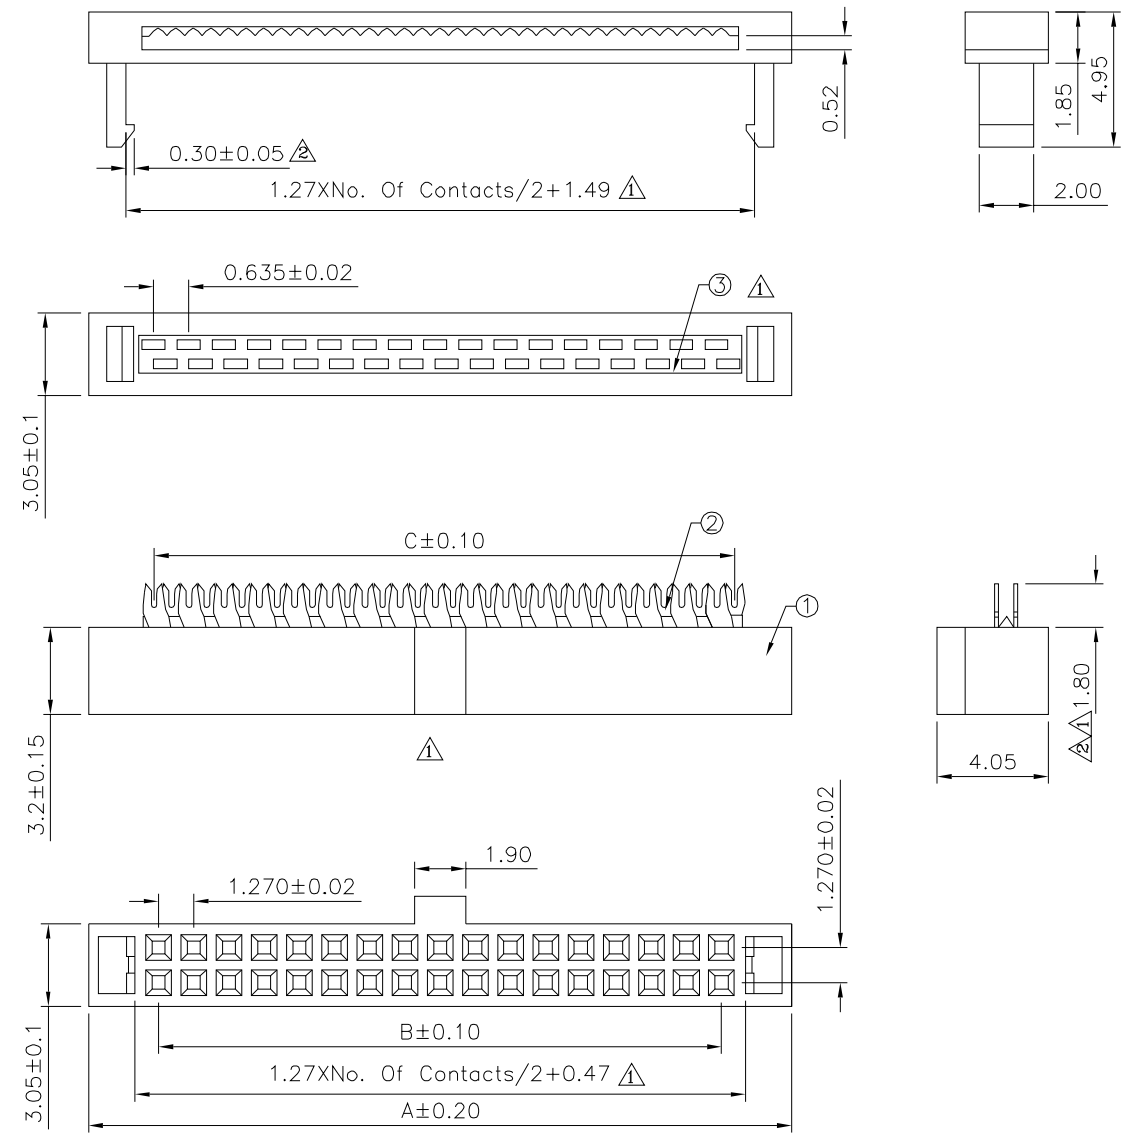

Pin	A	B	C
6	8.00	2.54	3.175
8	9.27	3.81	4.445
10	10.54	5.08	5.715
12	11.81	6.35	6.985
14	13.08	7.62	8.255
16	14.35	8.89	9.525
18	15.62	10.16	10.795
20	16.89	11.43	12.065
22	18.16	12.70	13.335
24	19.43	13.97	14.605
26	20.70	15.24	15.875
28	21.97	16.51	17.145
30	23.24	17.78	18.415
34	25.78	20.32	20.955
40	29.59	24.13	24.675
44	32.13	26.67	27.305
50	35.94	30.48	31.115
52	37.21	31.75	32.385
60	42.29	36.83	37.465
64	44.83	39.37	40.005
68	47.37	41.91	42.545
80	54.99	49.53	50.165

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm 0.30$ .XX $\pm 0.20$
15524		MEI		
		CHECKED BY		
SCALE		DRAWING BY		
NONE	REV.	A2	CYP	mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	04/12/2019
△A1		Modify Data	HZF	12/27/2018
△A0		NEW RELEASE	HZF	06/21/2016