
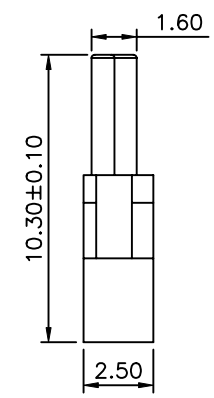
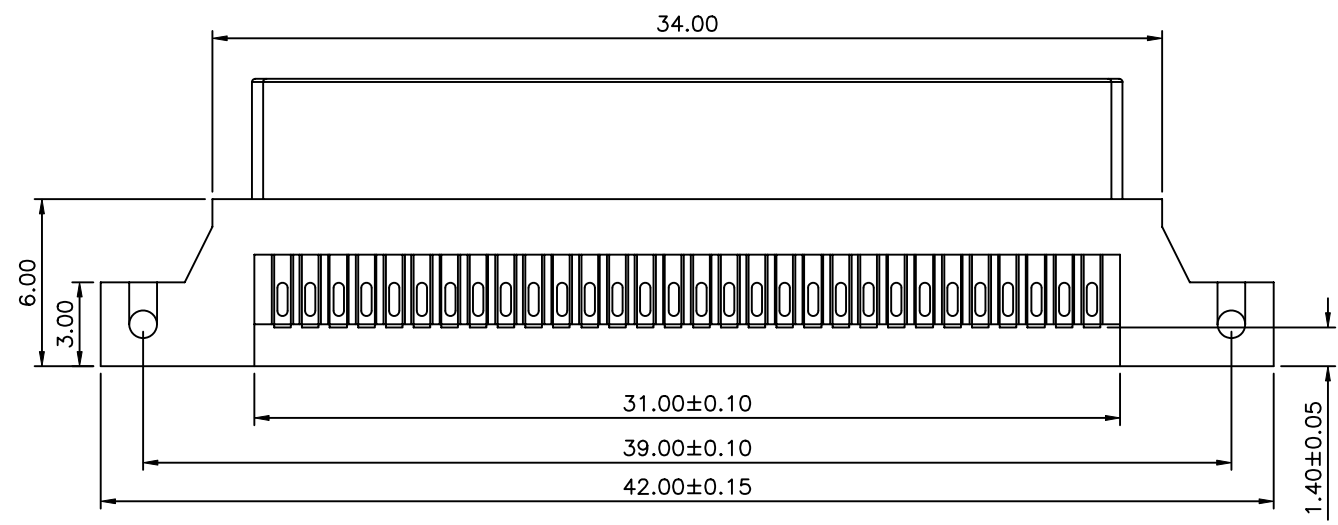


SPECIFICATION
 Current Rating:1Amp
 Withstanding Voltage:AC 500V For 1Minute
 Insulator Resistance:10Megohms Min,At DC 500V
 Contact Resistance:5 Ohms Max
 Operating Temperature:-40°C~+105°C
 Insulator:PA46+30% Glass Fiber (UL94V-0)
 Contact:Copper Alloy
 Contact Area:Gold Over Nickel
 Solder Tail:Tin Over Nickel
 RoHS Compliant

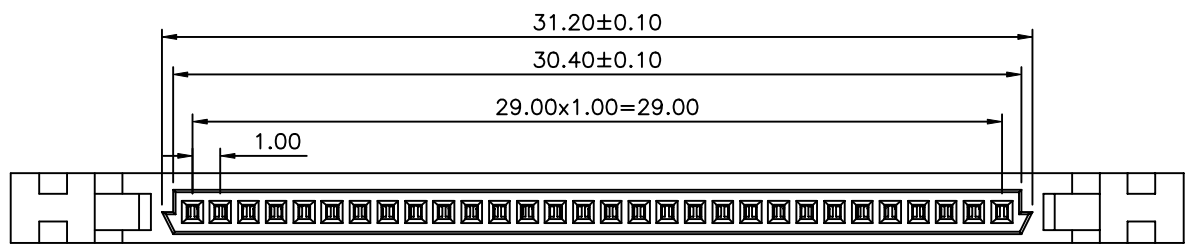

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.20 .XX ±0.10 ANG. ±1°
19237		MEI		
		HZZ		
		DRAWING BY		
		HYY		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZZ	05/20/2008