



△ SPECIFICATION


Voltage Rating:300V AC
 Current Rating:10 Amp/Way Max.
 Insulation Resistance:1000 Megaohms/1000V
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2000V AC For 1 Minute
 Test Time=60Sec./1PCS
 Wire Range:16~30AWG
 Torque:2 kgf.cm/M2
 Operation Temperature:-33°C~+105°C
 Soldering Reliability:Test Temperature=250°C±10°C
 5Seconds Max.
 Contact(Metal Housing):Copper Alloy,Nickel Plated
 Solder Pin:Copper Alloy,Tin Plated
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
 RoHS Compliant

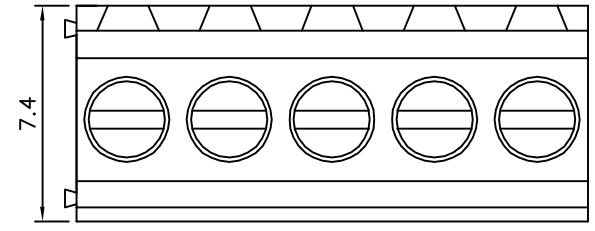


△

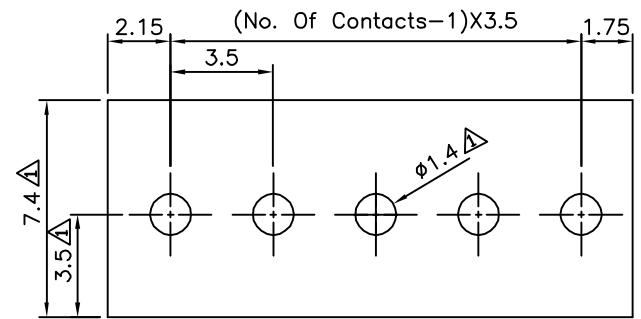

Recommended P.C.B. Layout

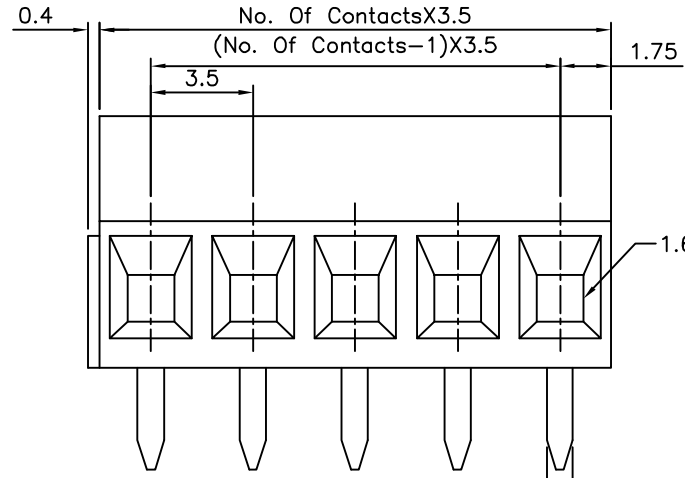

△

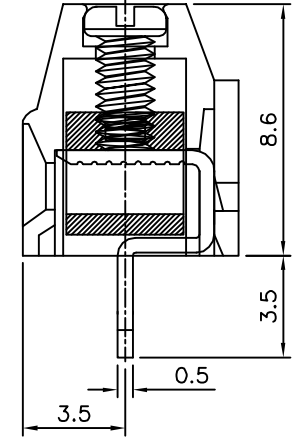

△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X* ±1*			
19707		MEI					
		CHECKED BY					
		HZF					
		DRAWING BY					
		WZL					
SCALE	NONE	REV.	A1	UNIT	mm		
		A1		Modify Data	HZF	05/13/2010	
		A0		NEW RELEASE	HZF	04/07/2009	
NO.REV.	REVISIONS		CHK	DATE			