
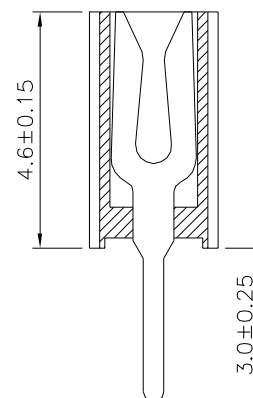
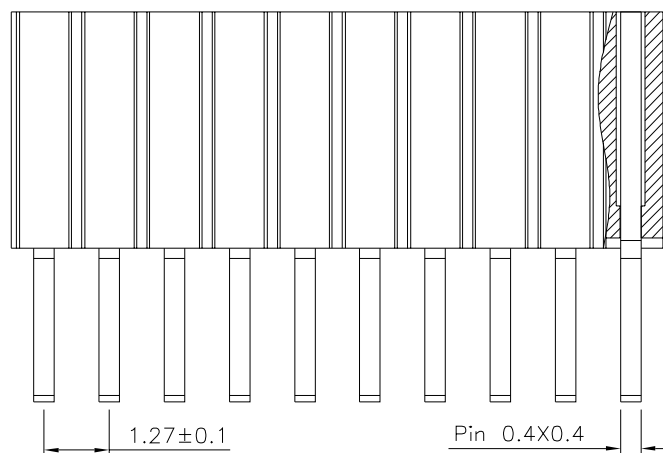


Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

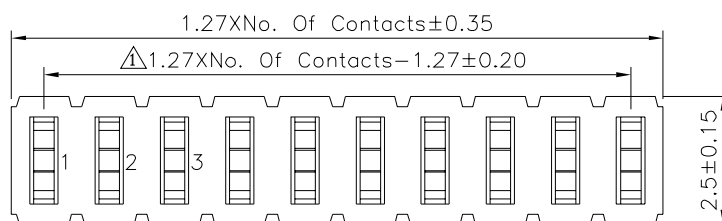

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

00076

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^\circ$
.X	± 0.20	.X*	$\pm 1.5^\circ$
.XX	± 0.15	.XX*	$\pm 1^\circ$
.XXX	± 0.10	.XXX*	$\pm 0.5^\circ$

	UNIT mm
--	------------



⚠	A1	Modify Data	HZF	03/26/2016
⚠	A0	NEW RELEASE	HZF	02/01/2015
NO.REV.	REVISIONS		CHK	DATE