

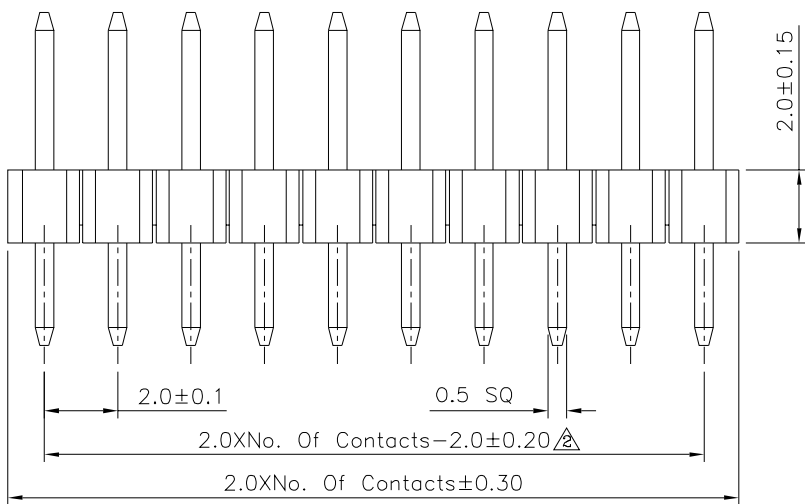


Recommended P.C.Board Layout(Top View)  
(PCB Board Tolerance±0.05)

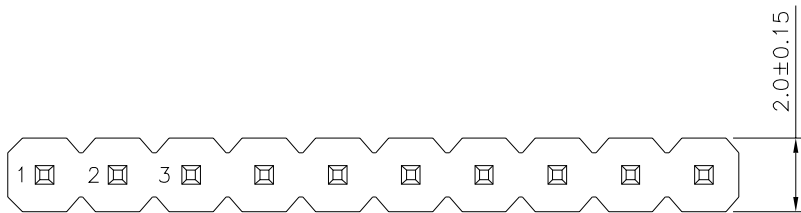

**SPECIFICATION**  
 Current Rating:1.5 Amps  
 Withstand Voltage:500V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
00184		MEI		△	
		CHECKED BY		X. ±0.25 X.* ±2°	
		HZF		.X ±0.20 .X* ±1.5°	
DRAWING BY		CYP		.XX ±0.15 .XX* ±1°	
SCALE		NONE		.XXX ±0.10 .XXX* ±0.5°	
REV.		A2		UNIT	
				mm	

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	05/31/2016
△	A1	Modify Data	HZF	01/07/2014
△	A0	NEW RELEASE	HZF	01/21/2011