
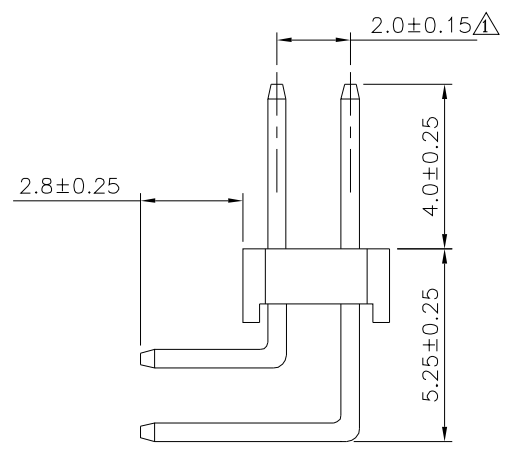
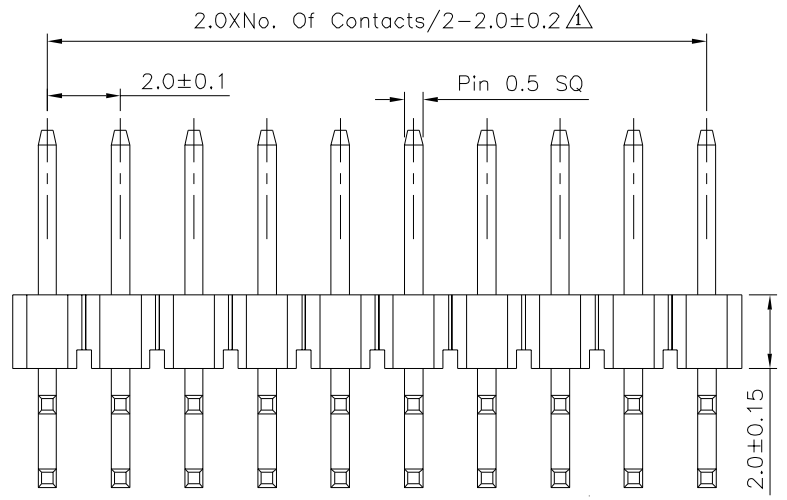


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

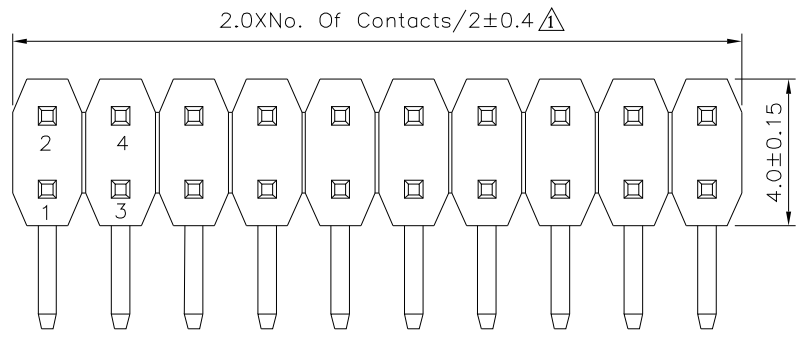

**SPECIFICATION**

Current Rating:1.5 Amps  
 Withstand Voltage:500V AC Min./Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PA6T(UL94V-0),Black  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.25$ X.* $\pm 2^*$ .X $\pm 0.20$ .X* $\pm 1.5^*$ .XX $\pm 0.15$ .XX* $\pm 1^*$ .XXX $\pm 0.10$ .XXX* $\pm 0.5^*$
00263		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		YBL		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
$\Delta$ A1		Modify Data	HZF	06/09/2021
$\Delta$ A0		NEW RELEASE	HZF	08/20/2013