

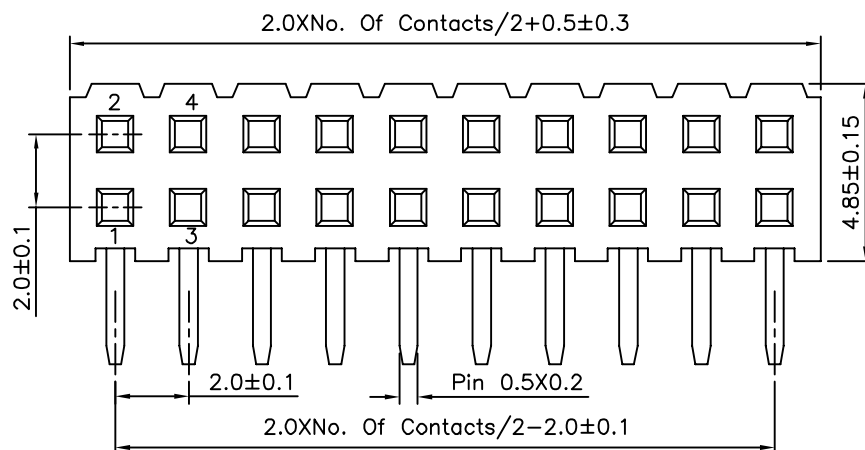


Recommended P.C.B. Layout

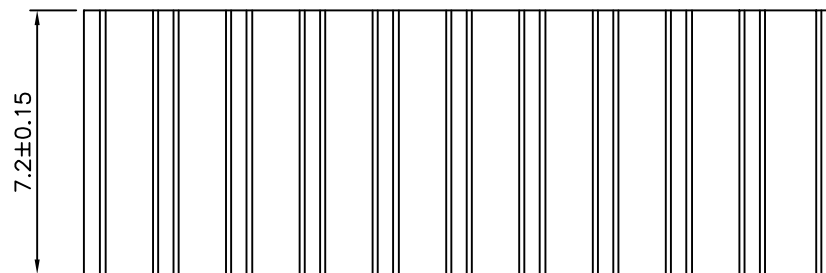

# SPECIFICATION

Current Rating:1.5 Amp  
 Withstand Voltage:500V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Plated Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

00377

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A0

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 >80 ±1.20  
 25~80 ±0.15  
 5~25 ±0.10  
 <5 ±0.05  
 ANG. ±0.03°

UNIT  
 mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

12/25/2012