File No.	697	SHEET	1/1

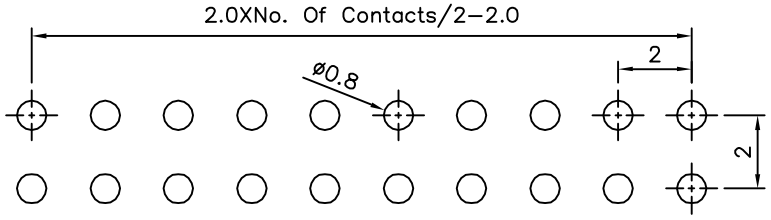

Recommended P.C.B. Layout

SPECIFICATION

Current Rating:1.5 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

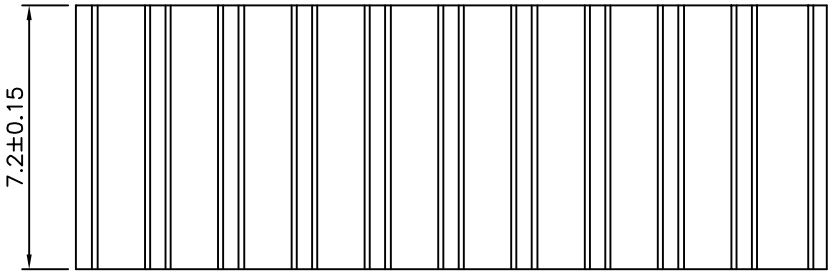

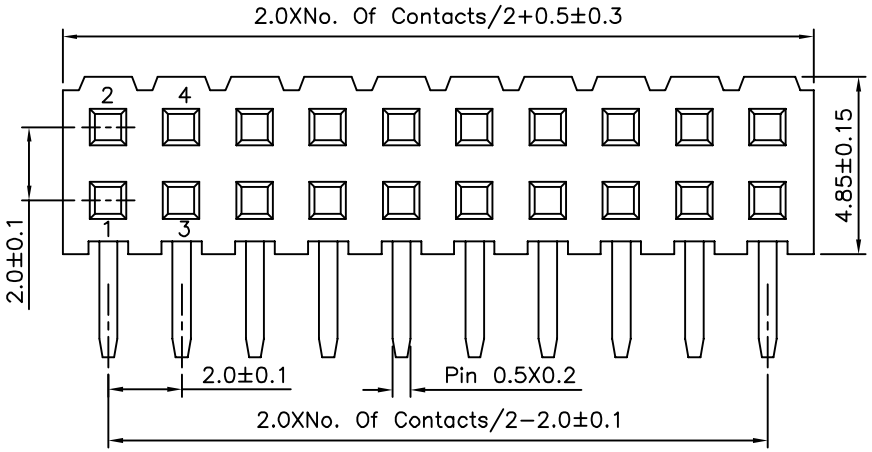



4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
00384	EMILY	>80 ±1.20				
	CHECKED BY HZF	25~80 ±0.15				
	DRAWING BY GAO	5~25 ±0.10				
		<5 ±0.05				
		ANG. ±0.03°				
SCALE NONE	REV. A0	UNIT mm	0	A0	NEW RELEASE	HZF 12/25/2012
			NO.	REV.	REVISIONS	CHK DATE