

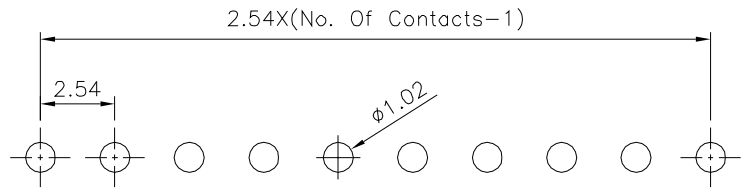
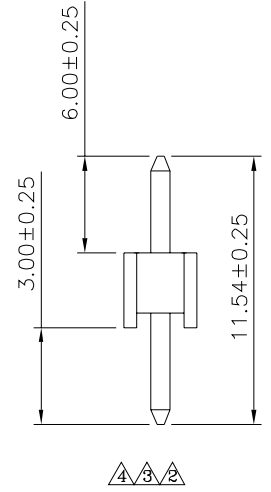


- △△ SPECIFICATION**
 Current: 3A
 Operation Temperature: -55°C ~ +105°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 △ Withstanding Voltage: 1000V AC/Mimute
 Housing: PBT(UL94V-0), Black
 △ Contact: Brass, Gold Flash Over Nickel
 No. Of Contacts: 02~40 Contacts
 RoHS Compliant

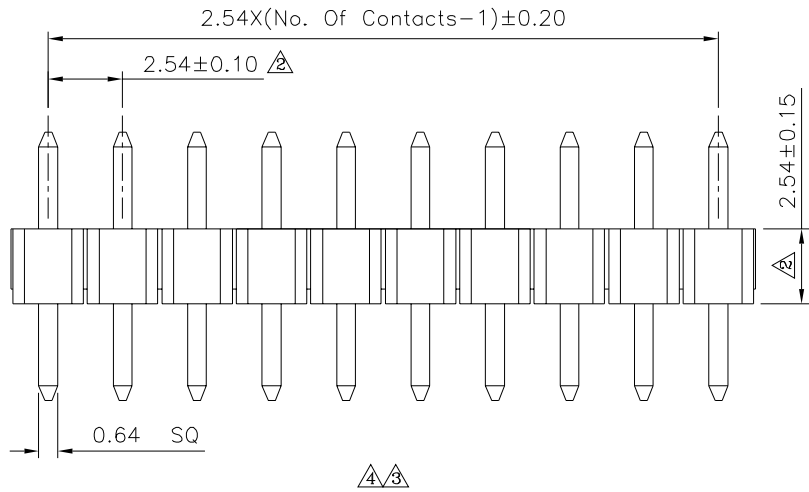

△ Recommended P.C.B. Layout

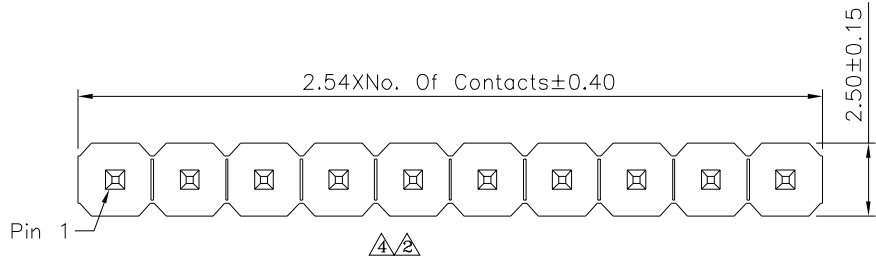

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ± 0.38 .XX ± 0.25 XXX ± 0.05		△ A4	Modify Data	HZF	08/15/2019
00818		MEI				△ A3	Modify Data	HZF	04/03/2014
		CHECKED BY				△ A2	Modify Data	HZF	11/01/2010
SCALE		NONE		DRAWING BY		△ A1	Modify Data	SHIN	04/26/2007
		REV.		A4		△ A0	NEW RELEASE	SHIN	03/06/2006
UNIT		mm		NO. REV.		REVISIONS		CHK	DATE