


△1 SPECIFICATION

Current:3A
 Operation Temperature:−55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 △ Withstanding Voltage:1000V AC/Mimute
 Housing:PBT(UL94V−0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

2.54X(No. Of Contacts−1)

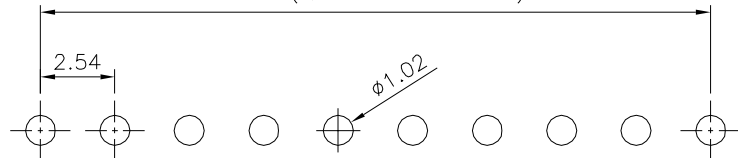

△ Recommended P.C.B. Layout

2.54XNo. Of Contacts±0.40

2.50±0.15

Pin 1

△△


2.54X(No. Of Contacts−1)±0.20

2.54±0.10 △

2.54±0.15

0.64 SQ

△△

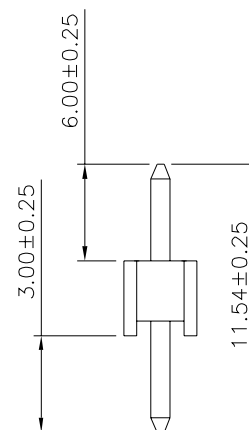

△△△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00819

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △ .X ±0.38
 .XX ±0.25
 XXX ±0.05

UNIT
 mm



△ A4	Modify Data	HZF	08/15/2019
△ A3	Modify Data	HZF	04/03/2014
△ A2	Modify Data	HZF	11/01/2010
△ A1	Modify Data	SHIN	04/26/2007
△ A0	NEW RELEASE	SHIN	03/06/2006
NO. REV.	REVISIONS	CHK	DATE