File No. 182PD02237 SHEET 1/1

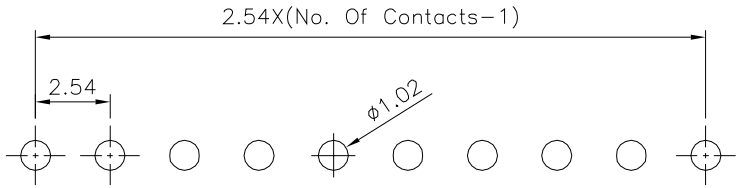

Recommended P.C.B. Layout

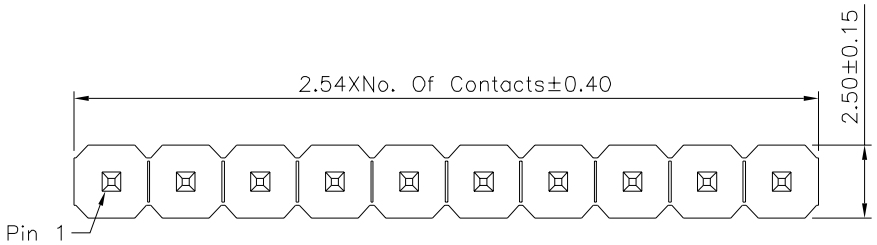

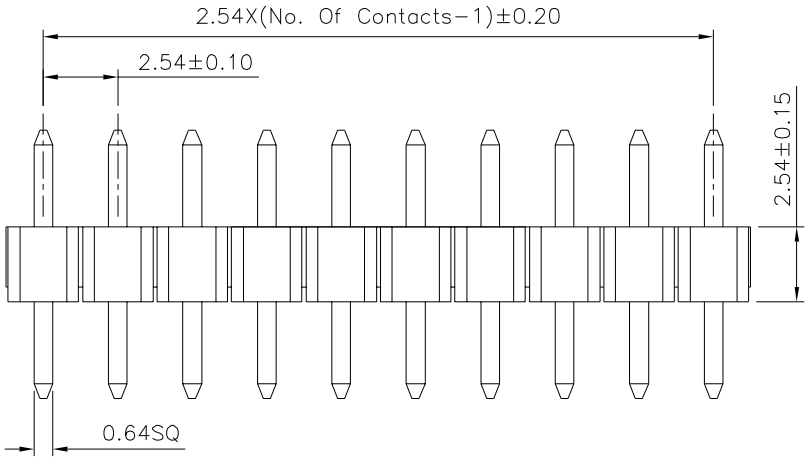

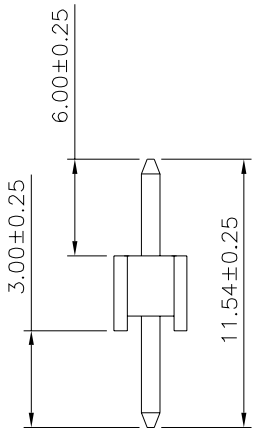

SPECIFICATION

Current:3A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1000V AC/Mimute
Operation Temperature:-40°C~+105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:02~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 00831	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 XXX ±0.05			
	CHECKED BY HZF				
	DRAWING BY CYP				
SCALE NONE	REV. B0	UNIT mm	0	B0	NEW RELEASE HZF 03/16/2025
			NO.	REV.	REVISIONS CHK DATE