

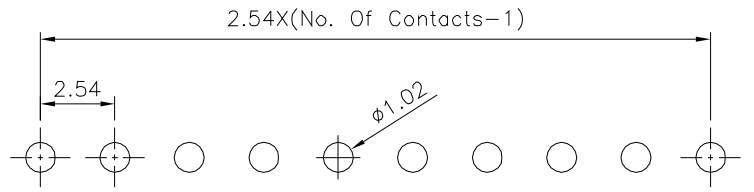
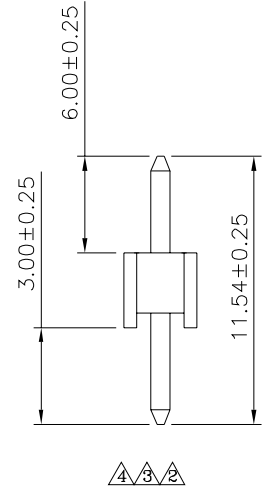


- △1 SPECIFICATION**  
 Current:3A  
 Operation Temperature: -55°C~+105°C  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
**△4** Withstanding Voltage:1000V AC/Mimute  
 Housing:PBT(UL94V-0),Black  
**△3** Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:02~40 Contacts  
 RoHS Compliant

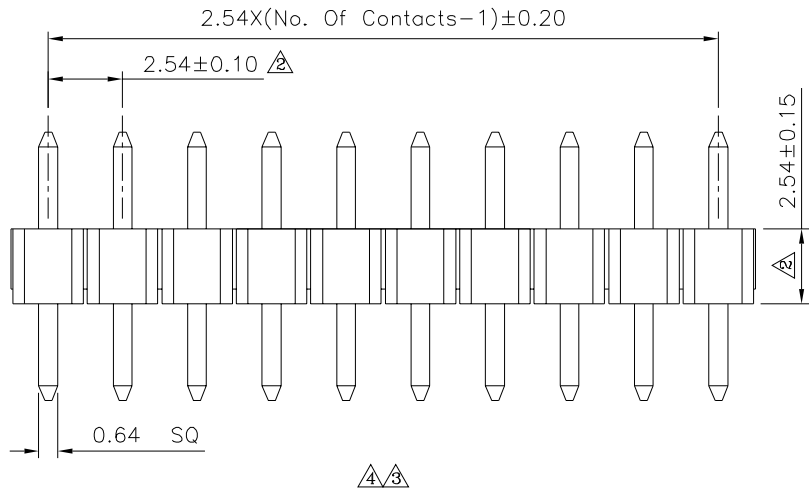

**△4** Recommended P.C.B. Layout

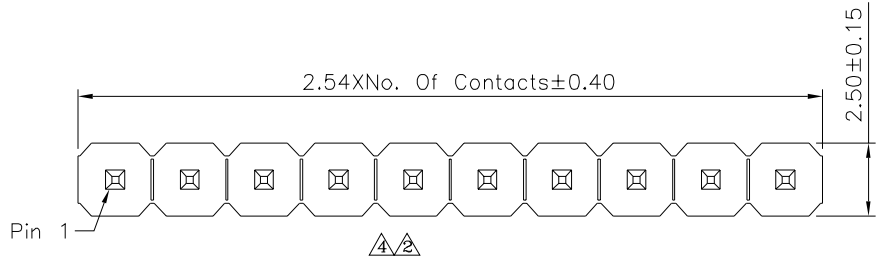

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 XXX ±0.05		△4	A4	Modify Data	HZF	08/15/2019			
00833		MEI				△3	A3	Modify Data	HZF	04/03/2014			
		CHECKED BY				HZF		△2	A2	Modify Data	HZF	11/01/2010	
SCALE		NONE		DRAWING BY		CYP		△1	A1	Modify Data	SHIN	04/26/2007	
REV.		A4		UNIT		mm		△0	A0	NEW RELEASE	SHIN	03/06/2006	
NO.		REV.		UNIT		mm		NO. REV.		REVISIONS		CHK	DATE