
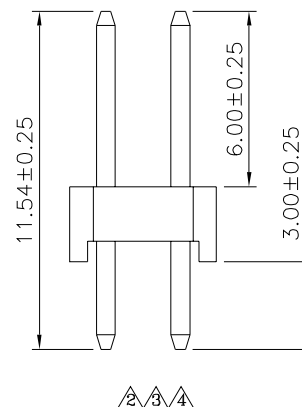
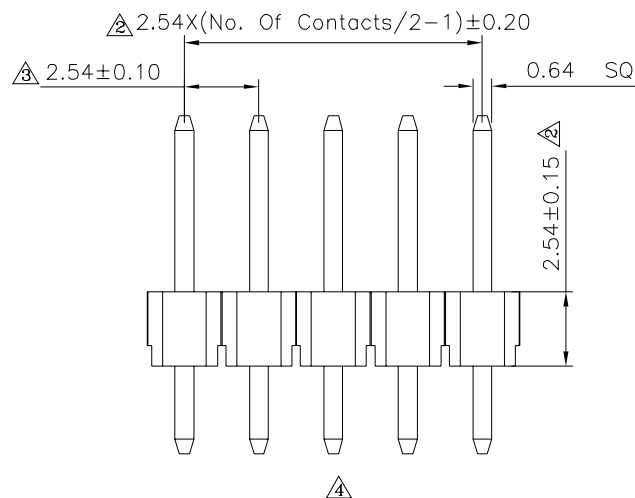


Recommended P.C.B. Layout

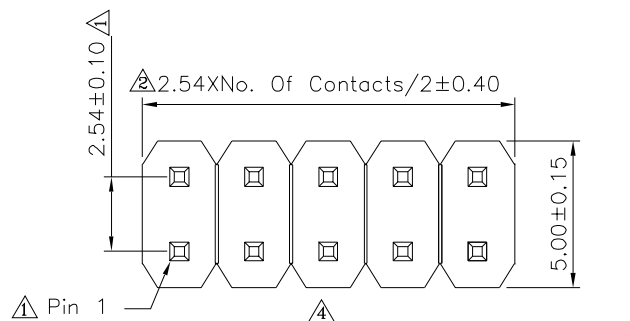

△△ SPECIFICATION

Current:3A

- △ Withstanding Voltage:1000V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-55°C~+105°C
- Housing:PBT(UL94V-0),Black
- △ Contact:Brass,Gold Flash Over Nickel
- No. Of Contacts:04~80 Pin
- RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

00991

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

△ .X ±0.38
.XX ±0.25
.XXX ±0.05

UNIT
mm



△ A4

Modify Data

HZF

08/22/2019

△ A3

Modify Data

HZF

03/31/2014

△ A2

Modify Data

HZF

08/19/2010

△ A1

Modify Data

HZF

04/22/2009

△ A0

NEW RELEASE

SHIN

03/06/2006

NO. REV.

REVISIONS

CHK

DATE