
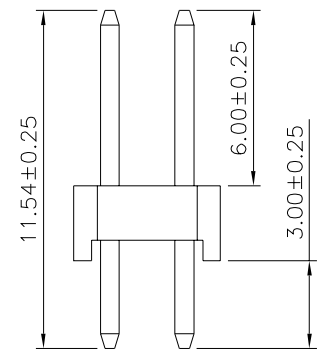
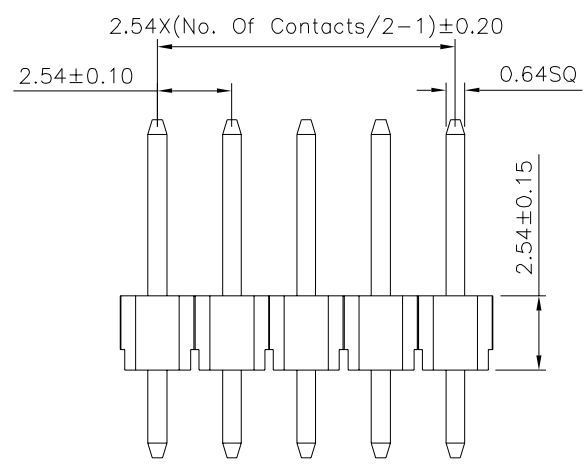


SPECIFICATION
 Current:3A
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Pin
 RoHS Compliant

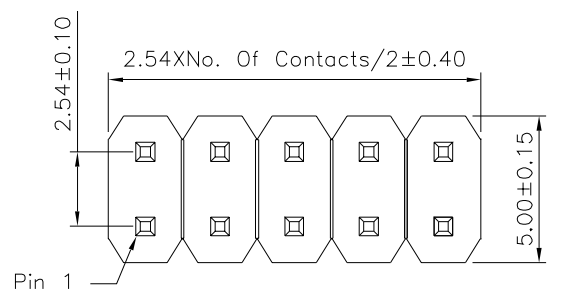

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05
01015		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE	REV.	CYP		
		B0		

NO.	REV.	BO	NEW RELEASE	HZF	10/20/2025
			REVISIONS	CHK	DATE