
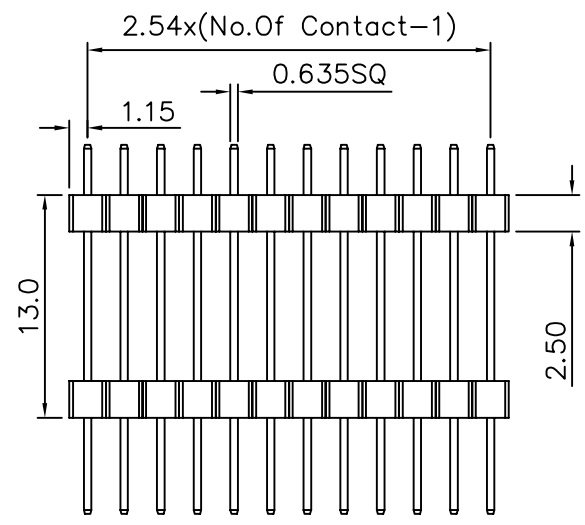
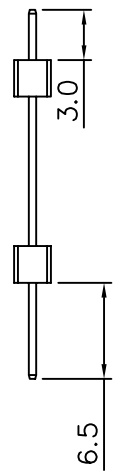


SPECIFICATIONS

Current Rating : 1AMP
 Insulation Resistance : 5000 Megohms Min. At DC 500V
 Contact Resistance : 20 Milliohms Max. At DC 100mA
 Operating Temperature : -55°C To +105°C
 Contact : Brass, Gold Flash
 Insulator : 30% Glass Filled PBT, UL 94V-0

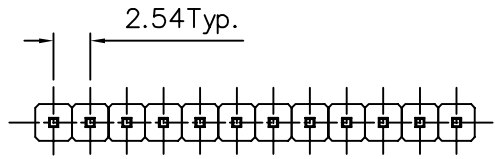

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 01135

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA	REVISIONS	CHK	DATE