
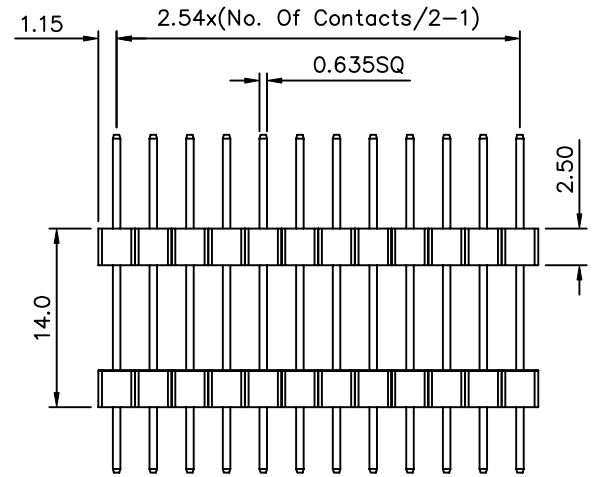
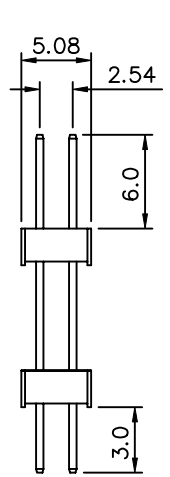


SPECIFICATIONS

Current Rating:1 Amp
 Insulation Resistance:5000 Megohms Min. At DC 500V
 Contact Resistance:20 Milliohms Max. At DC 100mA
 Operating Temperature:-55°C To +105°C
 Contact:Brass,Gold Flash
 Insulator:30% Glass Filled PBT,UL 94V-0
 RoHS Compliant

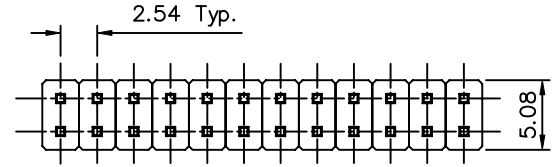

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
01147

APPROVED BY
MEI
 CHECKED BY
BECKY
 DRAWING BY
TCF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.
 UNIT mm

SCALE NONE

REV. A0

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	BECKY	04/28/2005