


**SPECIFICATIONS**

Current Rating : 1AMP  
 Insulation Resistance : 5000 Megohms Min. At DC 500V  
 Contact Resistance : 20 Milliohms Max. At DC 100mA  
 Operating Temperature : -55°C To +105°C  
 Contact : Brass, Gold Flash  
 Insulator : 30% Glass Filled PBT, UL 94V-0

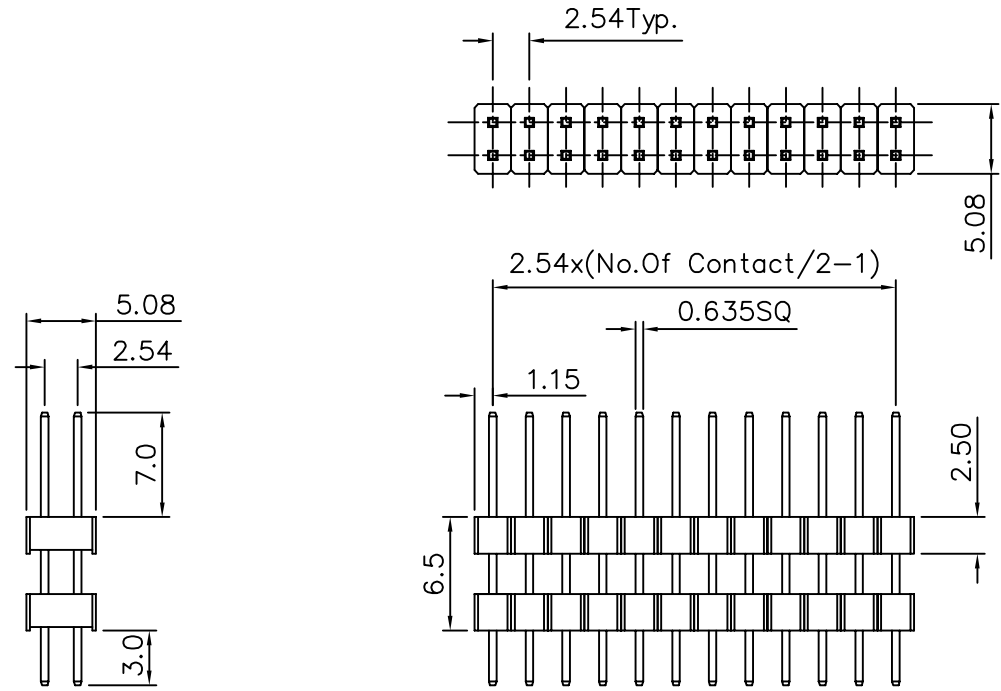

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 01153

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------