
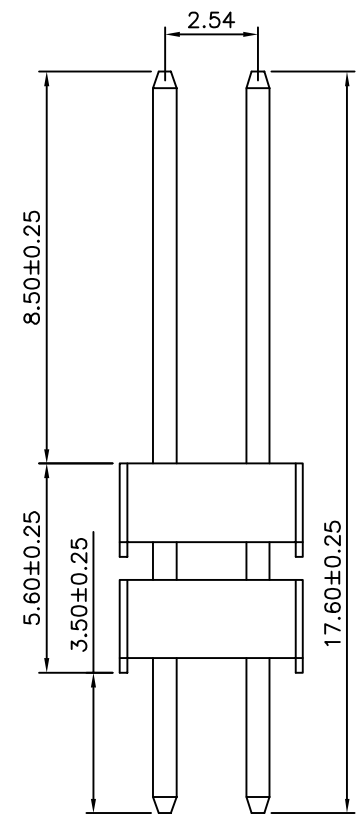


SPECIFICATION
 Current: 3A
 Withstand Voltage: 1000V AC RMS
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Operation Temperature: -55°C ~ +105°C
 Housing: PBT (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 No. of Contacts: 4 ~ 80 Contacts
 RoHS Compliant

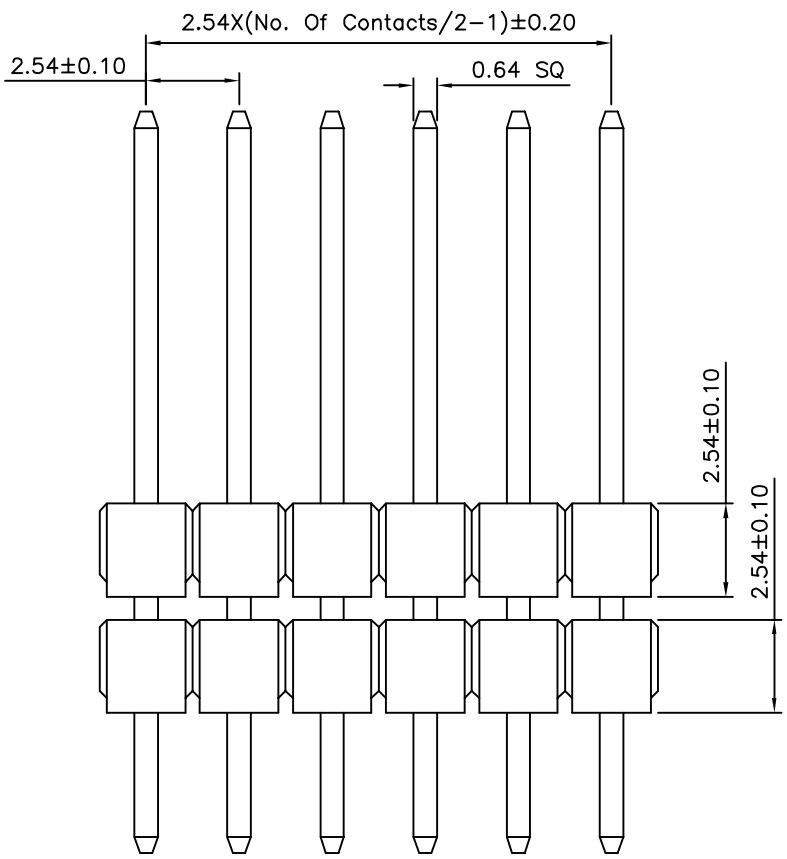

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.38 .XX ± 0.25 ANG. ± 5°
01156		EMILY		
		CHECKED BY HZF		
DRAWING BY		SAN		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	02/04/2014