
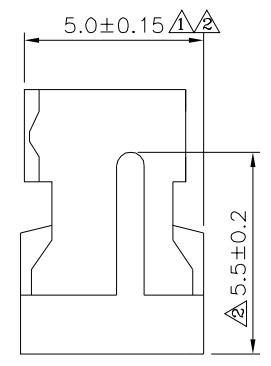
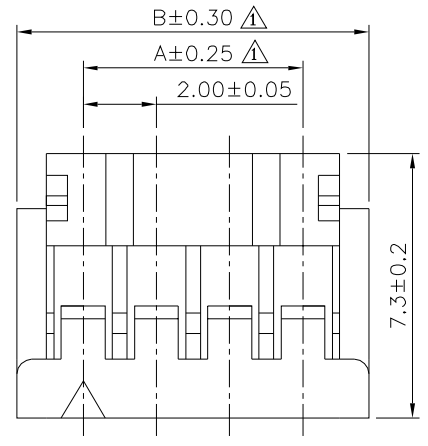


**△ SPECIFICATION**  
 Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC/DC  
 Withstand Voltage: 800V AC/Minute  
 Insulation Resistance: 1000 Megaohms Min.  
 Temperature Range: -25°C ~ +85°C  
 Material: PA66(UL94V-2), Black  
 RoHS Compliant

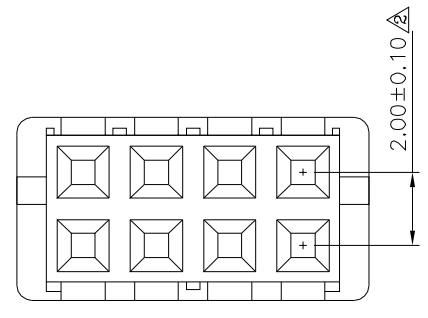

Pin	A	B
4	2.00	6.00
6	4.00	8.00
8	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00

**4U CON** 元化興業股份有限公司  
 4U CON TECHNOLOGY INC.

DRAWING No. **01347**  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY CYP  
 SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X<sub>i</sub> ± 0.5  
 XX<sub>i</sub> ± 0.25  
 .XXX ± 0.08  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	05/09/2015
△1	A1	Modify Data	HZF	09/23/2010
△0	A0	NEW RELEASE		