
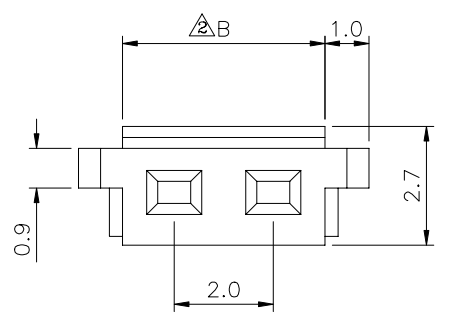


△ SPECIFICATION

Current Rating:

AWG	#24	#26	#28
Amperes	2.0	1.5	1.0

Voltage Rating:125V AC/DC
 Temperature Range:-25°C~+85°C
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:500V AC/Minute
 Material:Nylon66,UL94V-0
 RoHS Compliant

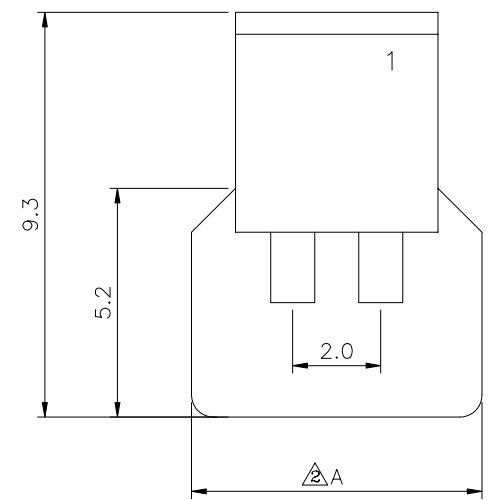

△ Pin	A	B
02	6.6	4.6
03	8.6	6.6
04	10.6	8.6
05	12.6	10.6
06	14.6	12.6
07	16.6	14.6
08	18.6	16.6
09	20.6	18.6
10	22.6	20.6

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
01568		MEI		
		CHECKED BY	HZF	
		DRAWING BY	XYH	
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify P/N	HZF	05/15/2009
△ A1		Add Specifications	SHIN	07/11/2006
△ A0		NEW RELEASE		