

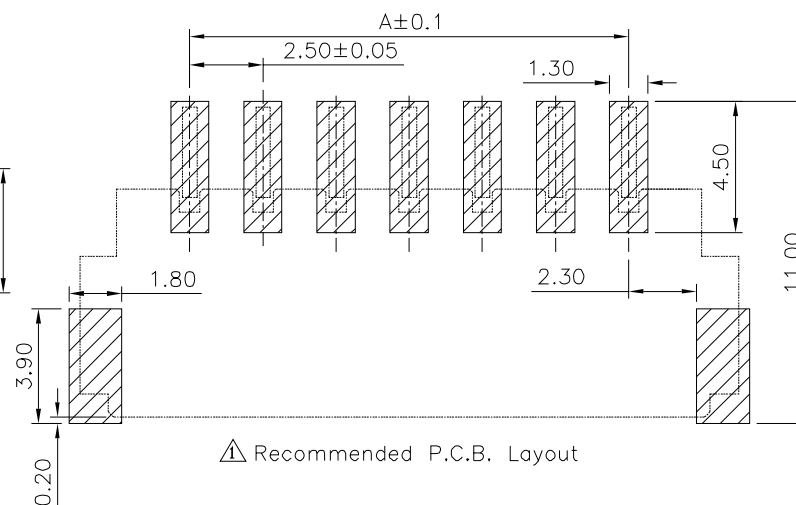
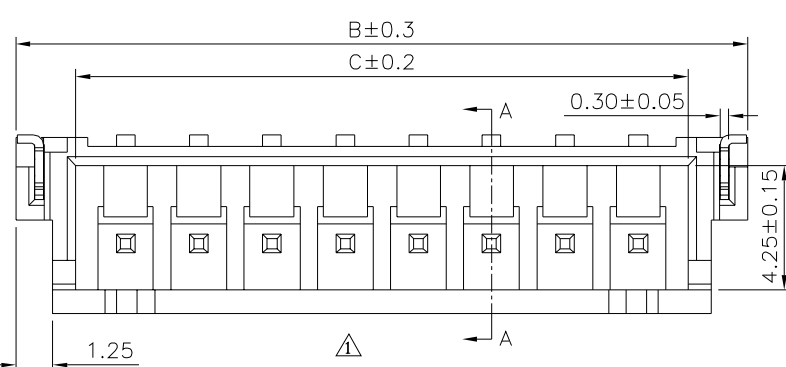
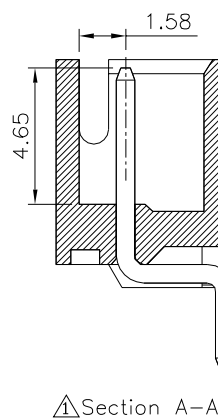
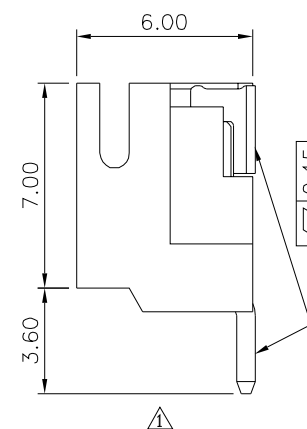


SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-25°C~+85°C
Housing:PA9T(UL94V-0),Beige
Contact:Brass,Tin Plated Over Nickel
Solder Nail:Brass,Tin Plated Over Nickel
RoHS Compliant

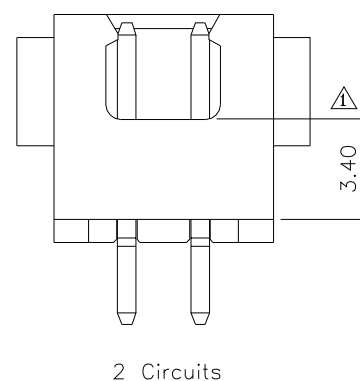

△ Recommended P.C.B. Layout

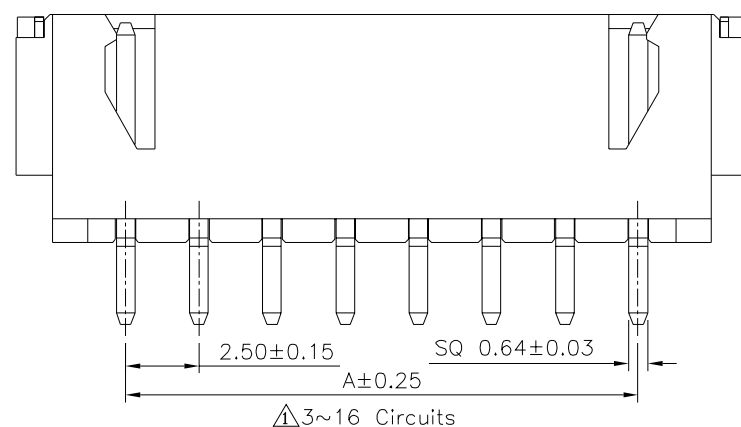

△ Section A-A

Pin	A	B	C
02	2.50	10.00	5.90
03	5.00	12.50	8.40
04	7.50	15.00	10.90
05	10.00	17.50	13.40
06	12.50	20.00	15.90
07	15.00	22.50	18.40
08	17.50	25.00	20.90
09	20.00	27.50	23.40
10	22.50	30.00	25.90
11	25.00	32.50	28.40
12	27.50	35.00	30.90
13	30.00	37.50	33.40
14	32.50	40.00	35.90
15	35.00	42.50	38.40
16	37.50	45.00	40.90

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

01623

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±2°

UNIT
mm

△ A1

Modify Data

HZF

08/10/2021

△ A0

NEW RELEASE

HZF

10/01/2015

NO. REV.

REVISIONS

CHK

DATE