
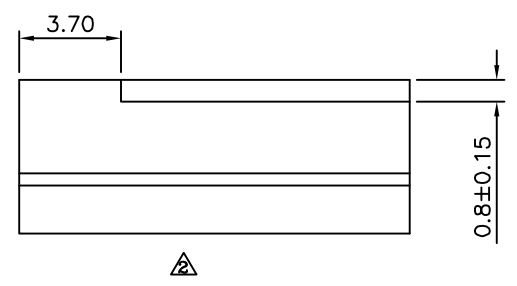
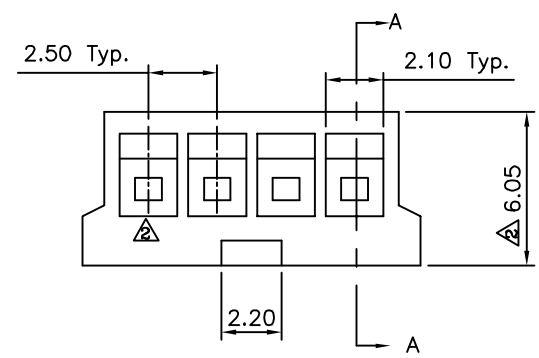
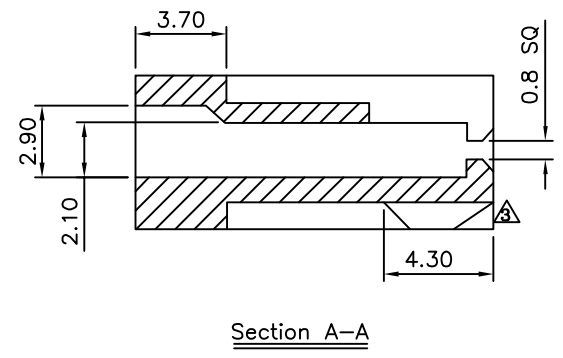


△△ SPECIFICATION
 Current Rating:2.5A
 Dielectric Withstanding Voltage:250V AC/DC
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-25°C~+85°C
 Insulator:PA66(UL94V-0)
 RoHS Compliant

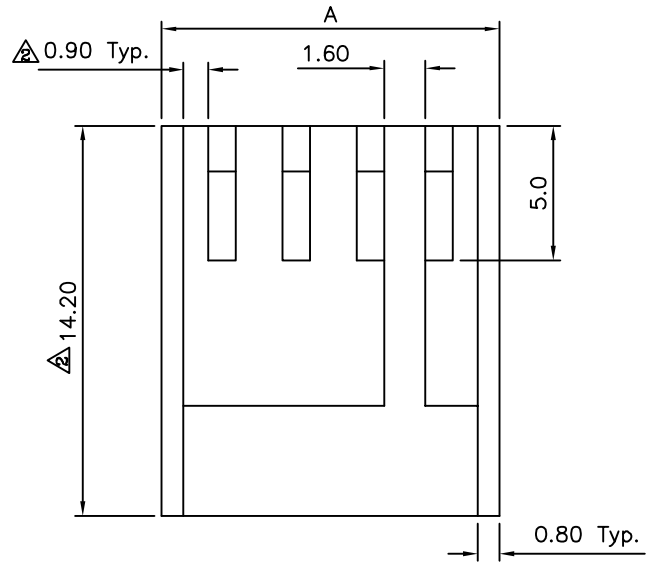

△	Pin	A
	02	7.30
	03	9.90
	04	12.50
	05	14.80
	06	17.40
	07	20.10
	08	22.20
△	09	25.00
	10	27.60
	11	29.80
	12	32.70

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
01646		EMILY		X. ±0.50 X.* ±5°	
		CHECKED BY		.X ±0.30 .X.* ±1°	
		DRAWING BY		.XX ±0.20 △	
		YBL		UNIT	
SCALE	NONE	REV.	A3	mm	

△ A3	Modify Data	HZF	01/10/2014
△ A2	Modify Data	HZF	07/04/2009
△ A1	Modify Circuits	SHIN	03/28/2007
△ A0	NEW RELEASE		
NO. REV.	REVISIONS	CHK	DATE