
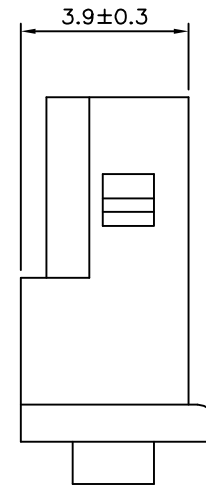
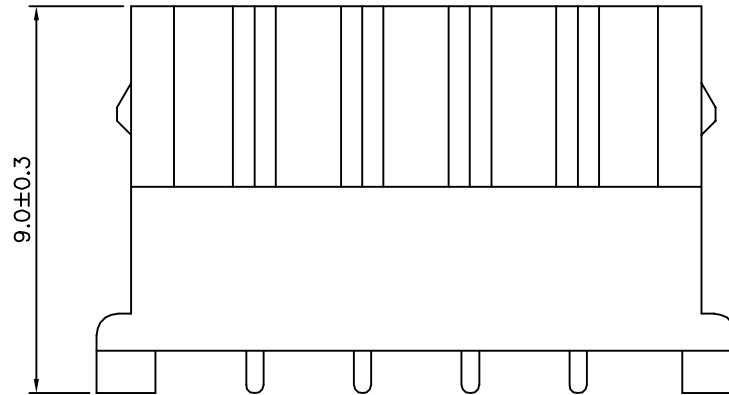


**SPECIFICATION**

Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Housing:PA66(UL94V-0)  
 RoHS Compliant

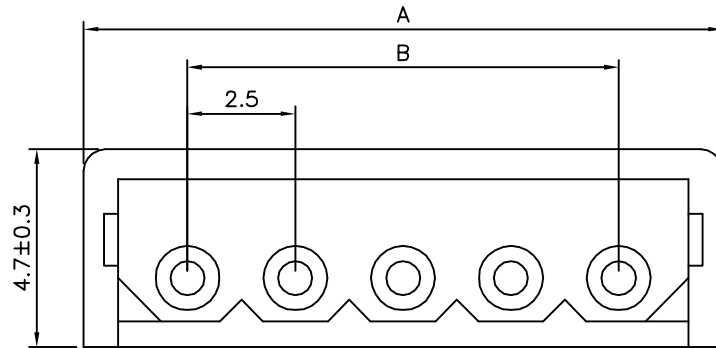

| Pin | A    | B    |
|-----|------|------|
| 02  | 7.5  | 2.5  |
| 03  | 10.0 | 5.0  |
| 04  | 12.5 | 7.5  |
| 05  | 15.0 | 10.0 |
| 06  | 17.5 | 12.5 |
| 07  | 20.0 | 15.0 |
| 08  | 22.5 | 17.5 |
| 09  | 25.0 | 20.0 |
| 10  | 27.5 | 22.5 |
| 11  | 30.0 | 25.0 |
| 12  | 32.5 | 27.5 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 01675

APPROVED BY  
 EMILY  
 CHECKED BY  
 HZF  
 DRAWING BY  
 HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 1~10 ±0.2  
 10~20 ±0.3  
 20~40 ±0.4  
 40~ ±0.5

SCALE NONE

REV. A0

UNIT mm

NO. REV. A0 NEW RELEASE HZF 01/16/2015

REVISIONS

CHK DATE