
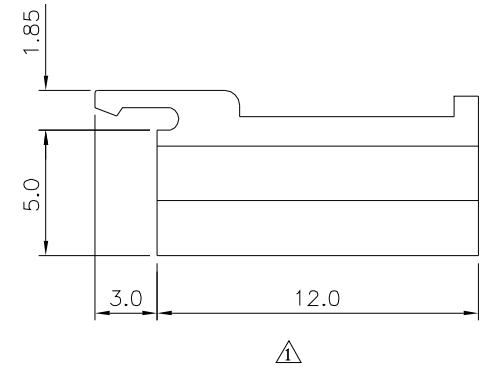


△ SPECIFICATION

Current Rating:3A AC/DC  
 Voltage Raing:250V AC/DC  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Material:PA66(UL94V-0),White  
 RoHS Compliant

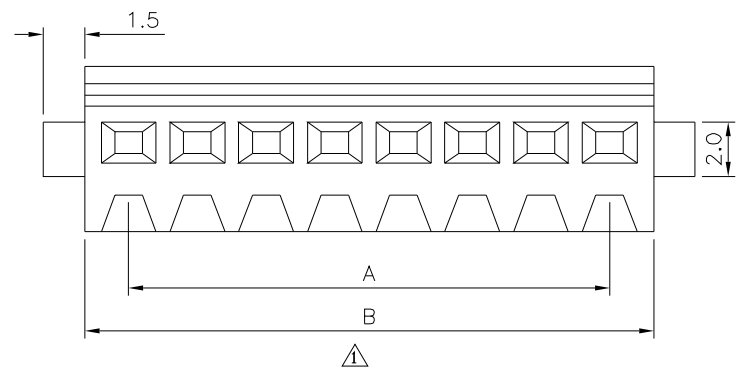

△ Pin	A	B
02	2.5	5.8
03	5.0	8.3
04	7.5	10.9
05	10.0	13.4
06	12.5	15.8
07	15.0	18.4
08	17.5	20.8
09	20.0	23.4
10	22.5	25.8
11	25.0	28.4
12	27.5	31.0
13	30.0	33.4
14	32.5	35.9
15	35.0	38.5
16	37.5	41.0
17	40.0	43.4
18	42.5	46.0
19	45.0	48.5
20	47.5	51.0

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.3 △ .XX ±0.3
01799		MEI		
		CHECKED BY HZF		
SCALE		REV.		UNIT
NONE		A1		mm

△ A1	Modify Data	HZF	02/09/2017
△ A0	NEW RELEASE		
NO. REV.	REVISIONS	CHK	DATE