


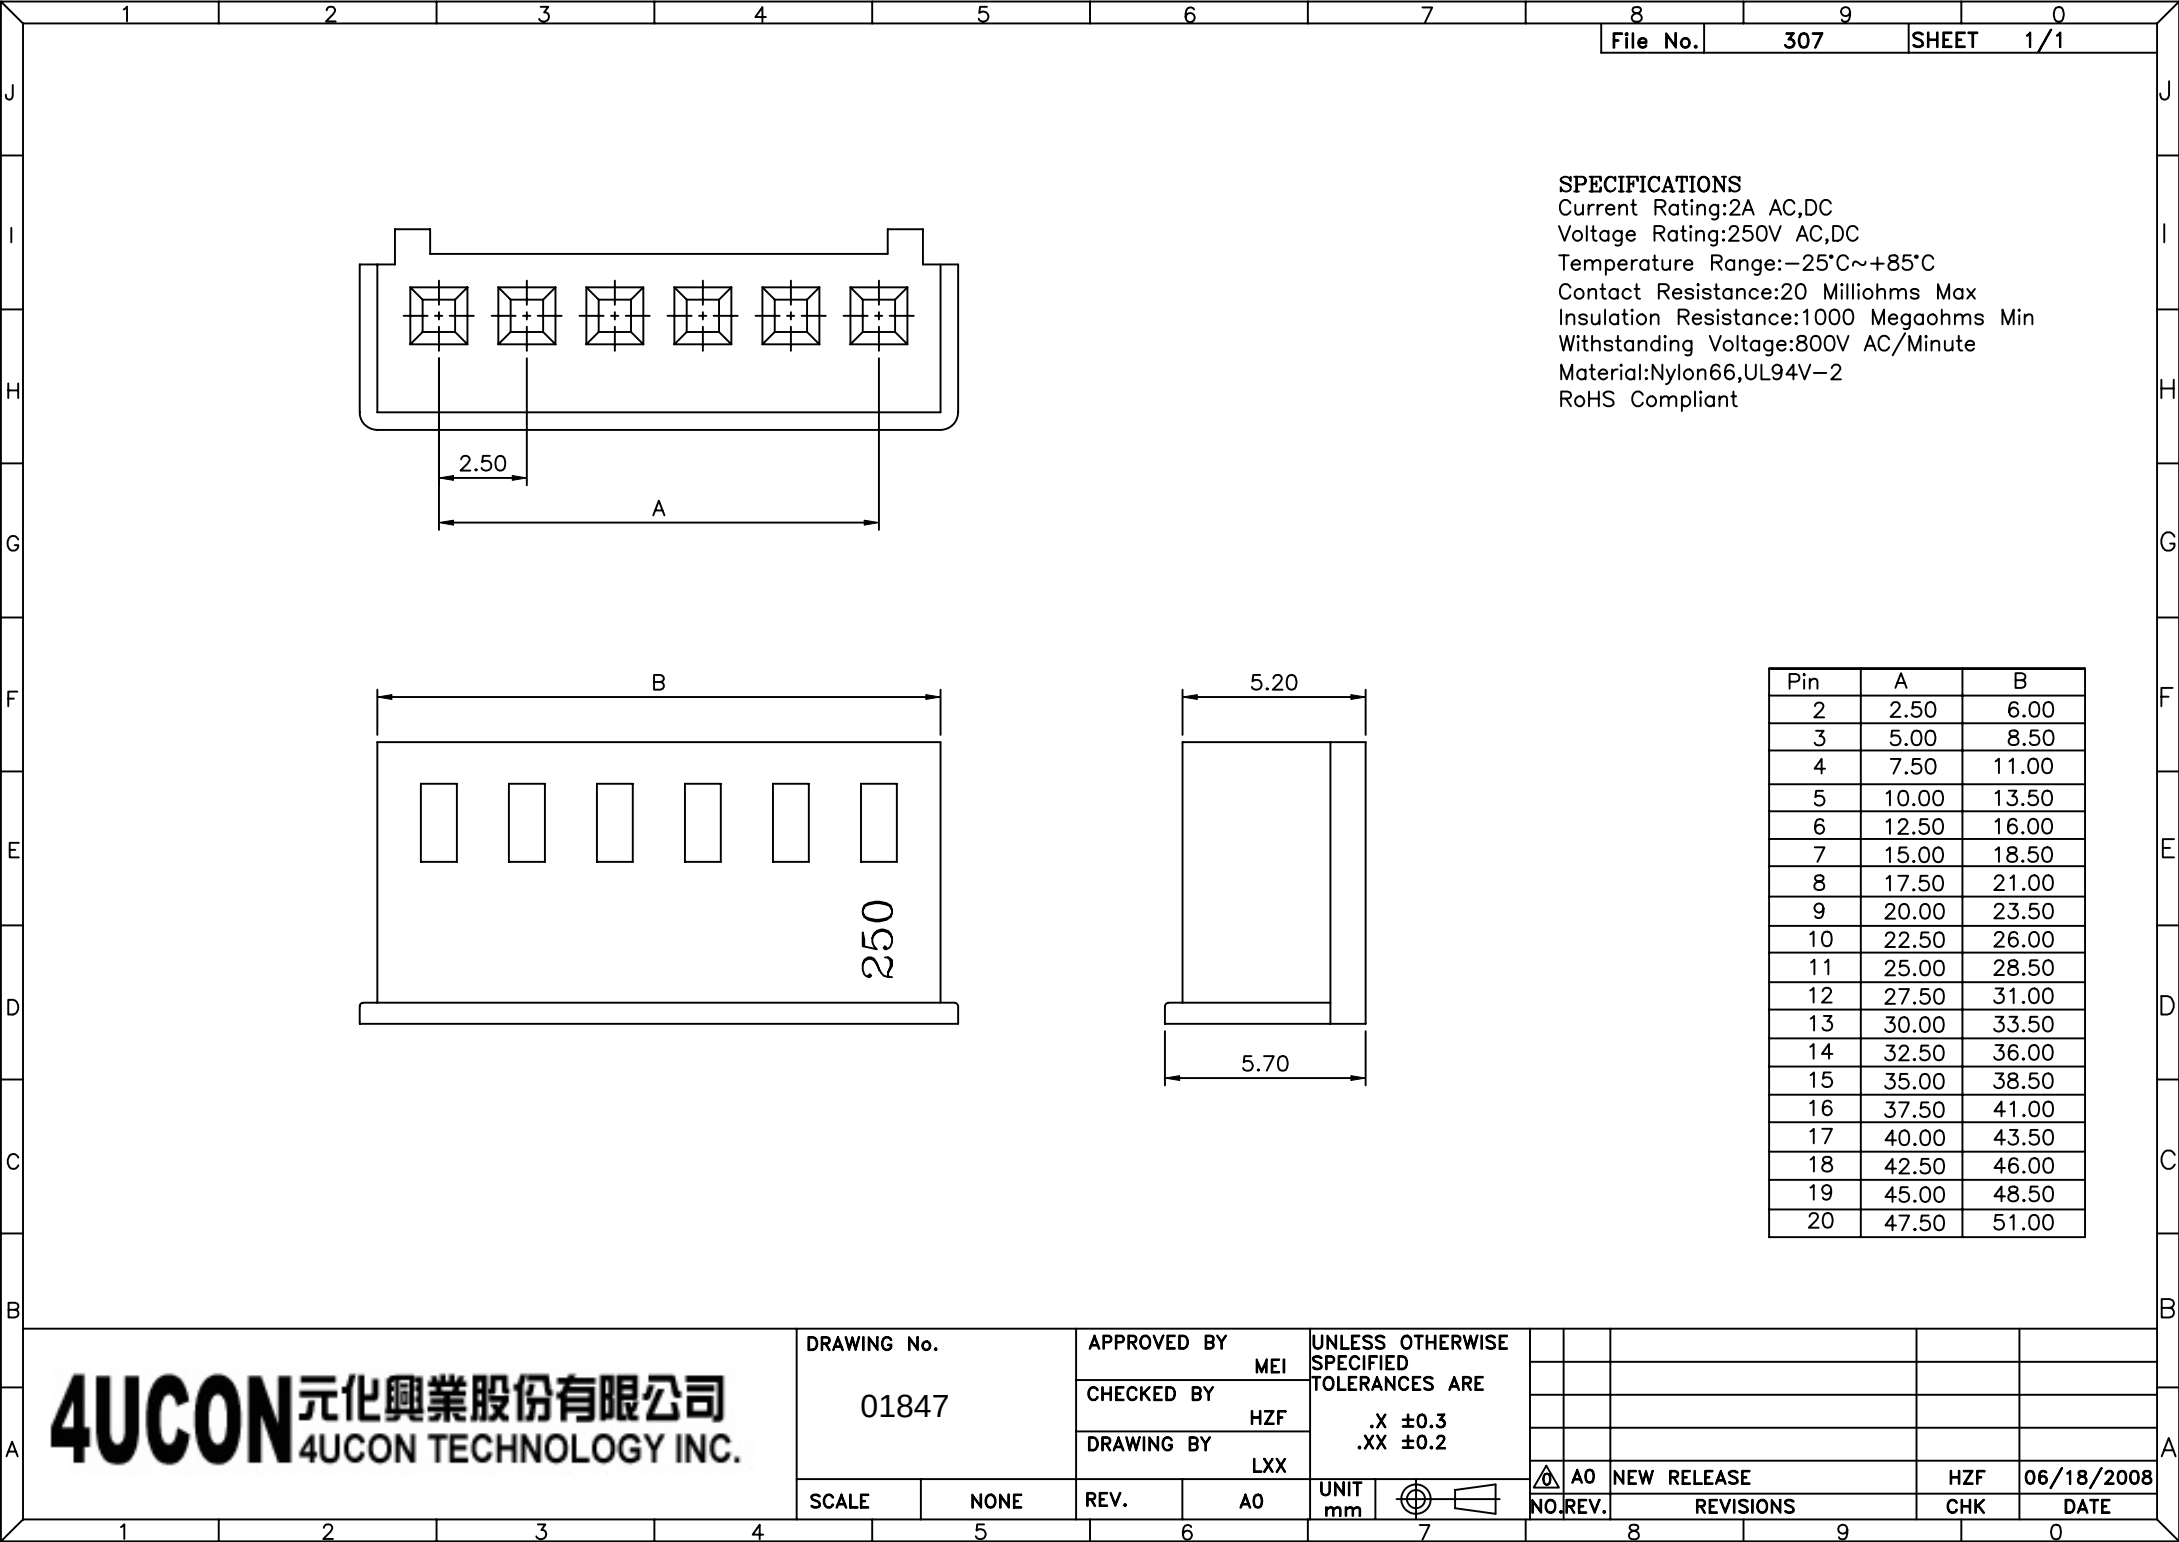

SPECIFICATIONS
Current Rating:2A AC,DC
Voltage Rating:250V AC,DC
Temperature Range:-25°C~+85°C
Contact Resistance:20 Milliohms Max
Insulation Resistance:1000 Megaohms Min
Withstanding Voltage:800V AC/Minute
Material:Nylon66,UL94V-2
RoHS Compliant

Pin	A	B
2	2.50	6.00
3	5.00	8.50
4	7.50	11.00
5	10.00	13.50
6	12.50	16.00
7	15.00	18.50
8	17.50	21.00
9	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50
16	37.50	41.00
17	40.00	43.50
18	42.50	46.00
19	45.00	48.50
20	47.50	51.00

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
01847


APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
LXX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.3
.XX ±0.2

SCALE
NONE

REV.
A0

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	06/18/2008