
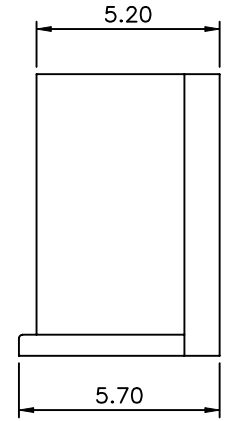
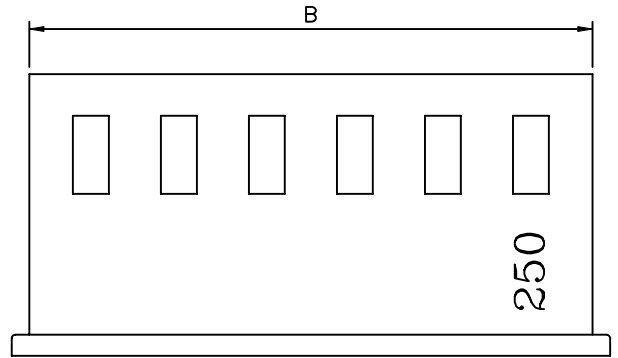


**SPECIFICATIONS**

Current Rating:2A AC,DC  
 Voltage Rating:250V AC,DC  
 Temperature Range:-25°C~+85°C  
 Contact Resistance:20 Milliohms Max  
 Insulation Resistance:1000 Megaohms Min  
 Withstanding Voltage:800V AC/Minute  
 Material:Nylon66,UL94V-2  
 RoHS Compliant

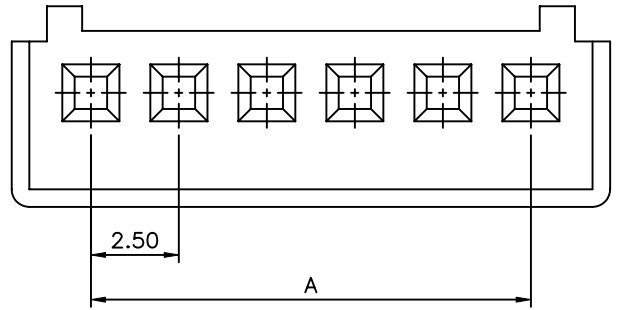

| Pin | A     | B     |
|-----|-------|-------|
| 2   | 2.50  | 6.00  |
| 3   | 5.00  | 8.50  |
| 4   | 7.50  | 11.00 |
| 5   | 10.00 | 13.50 |
| 6   | 12.50 | 16.00 |
| 7   | 15.00 | 18.50 |
| 8   | 17.50 | 21.00 |
| 9   | 20.00 | 23.50 |
| 10  | 22.50 | 26.00 |
| 11  | 25.00 | 28.50 |
| 12  | 27.50 | 31.00 |
| 13  | 30.00 | 33.50 |
| 14  | 32.50 | 36.00 |
| 15  | 35.00 | 38.50 |
| 16  | 37.50 | 41.00 |
| 17  | 40.00 | 43.50 |
| 18  | 42.50 | 46.00 |
| 19  | 45.00 | 48.50 |
| 20  | 47.50 | 51.00 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 01855

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY LXX

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.3  
 .XX ±0.2

SCALE NONE

REV. A0

UNIT mm

△ A0 NEW RELEASE HZF 06/18/2008  
 NO. REV. REVISIONS CHK DATE