
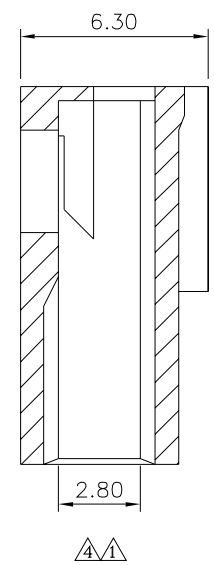
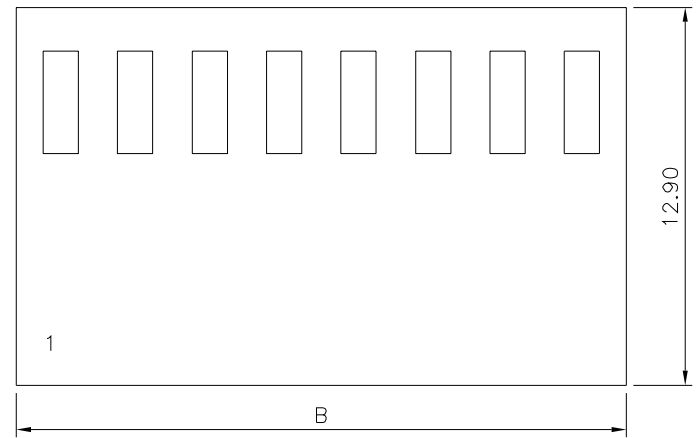


SPECIFICATION
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC Max.
 Operating Temperature: -25°C~+85°C
 Insulation Resistance: 1000 Megaohms Min.
 Withstand Voltage: 1000V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Material: PA66(UL94V-2)
 RoHS Compliant

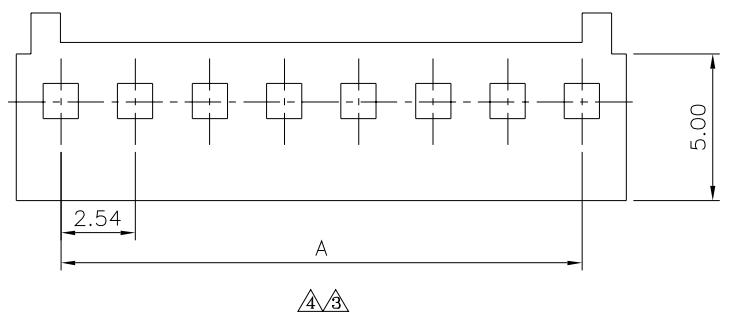

Pin	A	B
02	2.54	5.64
03	5.08	8.16
04	7.62	10.72
05	10.16	13.30
06	12.70	15.78
07	15.24	18.40
08	17.78	20.80
09	20.32	23.50
10	22.86	26.00
11	25.40	28.50
12	27.94	31.00
13	30.48	33.50
14	32.02	36.00
15	35.56	38.50
16	38.10	41.20
17	40.64	43.60
18	43.18	46.32
20	48.26	51.34

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. \triangle		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X \pm 0.35 .XX \pm 0.25 ANG.
01945		MEI		
		CHECKED BY HZF		
SCALE		REV.		UNIT
NONE		B4		mm

\triangle B4	Modify Data	HZF	12/06/2018
\triangle B3	Modify Data	HZF	09/09/2011
\triangle B2	Modify Data	HZF	12/26/2008
\triangle B1	Modify Data	HZF	07/21/2008
\triangle B0	NEW RELEASE	BECKY	07/19/2005
NO. REV.	REVISIONS	CHK	DATE