
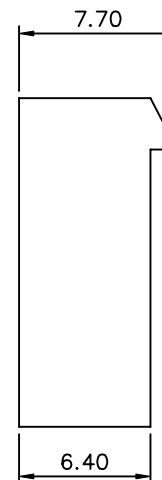
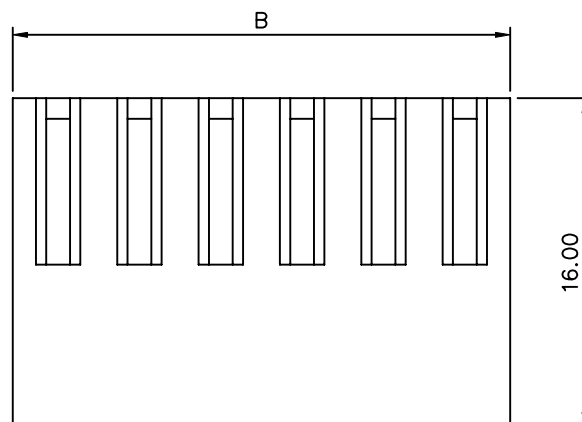


SPECIFICATION

Current Rating: 5A AC/DC
 Voltage Rating: 250V AC/DC
 Operation Temperature: -25°C~+85°C
 Insulation Resistance: 1000 Megaohms Min.
 Contact Resistance: 10 Milliohms Max.
 Dielectric Withstanding Voltage: 1500V AC/Min.
 Material: PA66(UL94V-2)
 RoHS Compliant

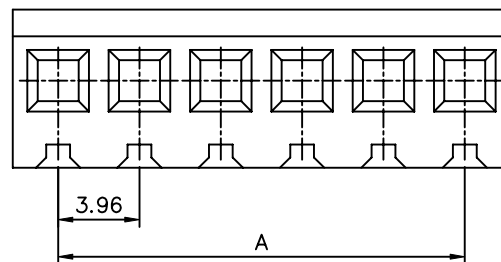

Poles	A	B
02	3.96	8.45
03	7.92	12.39
04	11.88	16.35
05	15.84	20.31
06	19.80	24.27
07	23.76	28.23
08	27.72	32.19
09	31.68	36.15
10	35.64	40.11
11	39.60	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.40	63.87
17	63.36	67.83
18	67.32	71.79
20	75.24	79.71

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02138

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

TCF

REV.

B0

UNLESS OTHERWISE
 SPECIFIED


TOLERANCES ARE

.X ±0.5

.XX ±0.35

ANG.

UNIT
 mm



NO. REV.

B0

NEW RELEASE

REVISIONS

CHK

DATE

BECKY 07/06/2005