
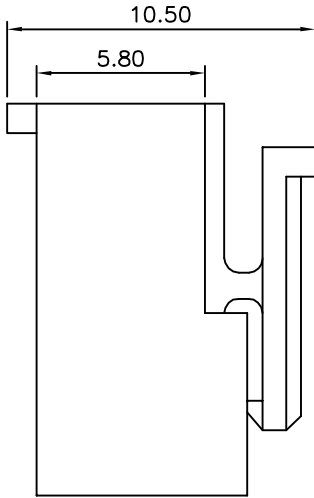
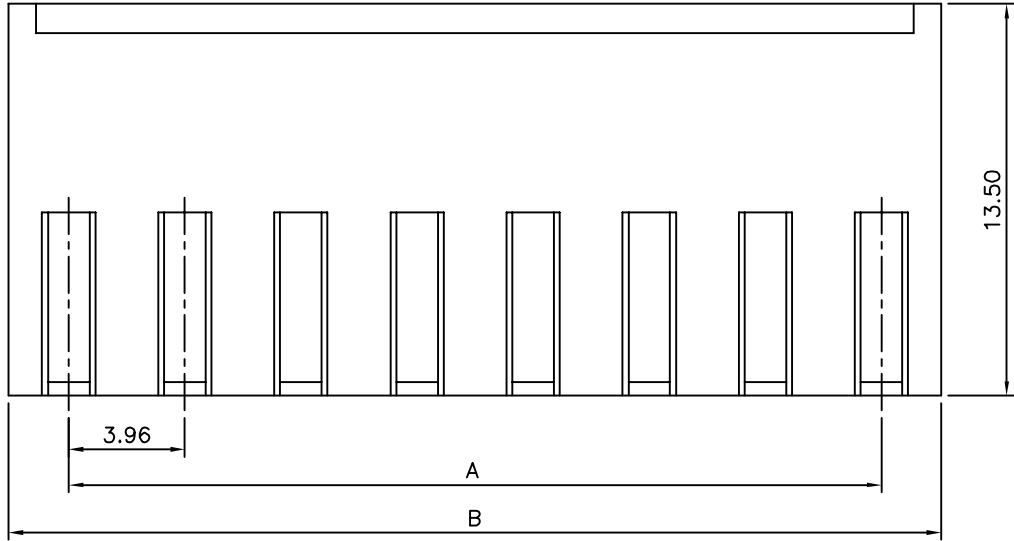


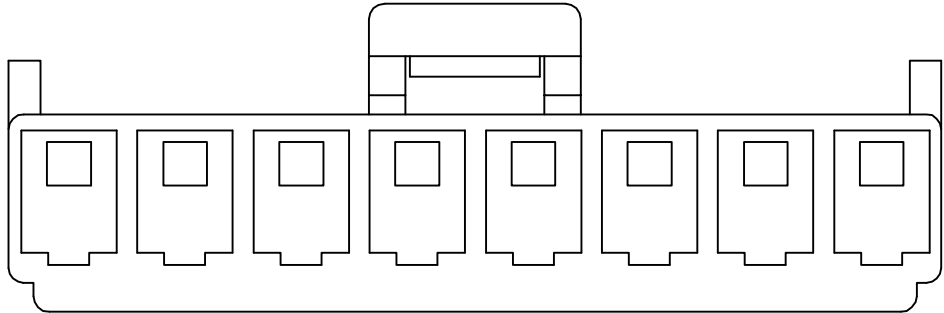

△△ SPECIFICATION
Current Rating: 5A AC/DC
Voltage Rating: 250V AC Max.
Operating Temperature: -25°C~+85°C
Insulation Resistance: 1000 Megaohms Min.
Insulator: PA66(UL94V-0)
RoHS Compliant

△	Pin	A	B
	02	3.96	8.04
	03	7.92	12.10
	04	11.88	15.96
	05	15.84	20.00
	06	19.80	23.90
	07	23.76	27.90
	08	27.72	31.86
	09	31.68	35.88
	10	35.64	39.84
	11	39.60	43.74
	12	43.56	47.74
	13	47.52	51.70
	14	51.48	55.66

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02193		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY GAO	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
△ .X	±0.5
.XX	±0.25
ANG.	
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	12/04/2012
△	A1	Modify Data	HZF	12/28/2011
△	A0	NEW RELEASE	RAN	