
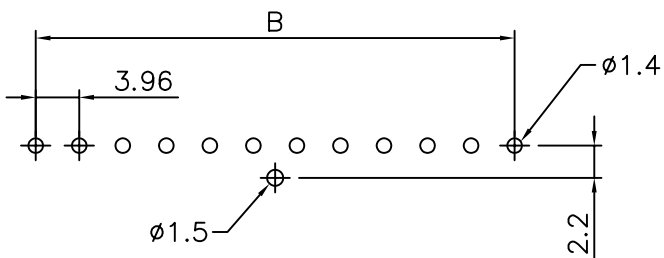

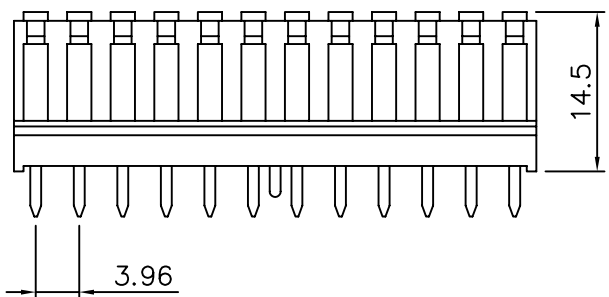


SPECIFICATIONS

Current Rating: 7A AC, DC
 Voltage Rating: 250V AC,DC
 Contact: Brass, Tin Plated
 Material: Nylon 66,UL94V-2,White
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 1,000 Megohms Min.
 Withstand Voltage: 1500V AC/Minute
 Applicable PC Board Thickness: 1.6mm

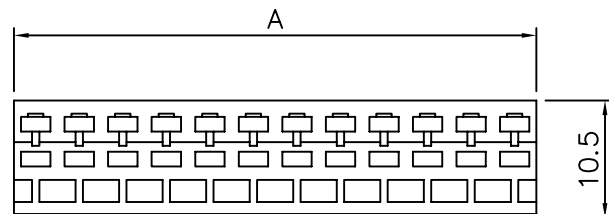

P.C.B Layout

Poles	A	B
6	23.80±0.20	19.80
12	47.50±0.40	43.56

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02221

APPROVED BY

MEI

CHECKED BY

SHIN

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X 0.38

.XX 0.25


SCALE

NONE

REV.

B0

UNIT
 mm



NO. REV.

NEW RELEASE
 REVISIONS

SHIN
 CHK

02/08/2007
 DATE