
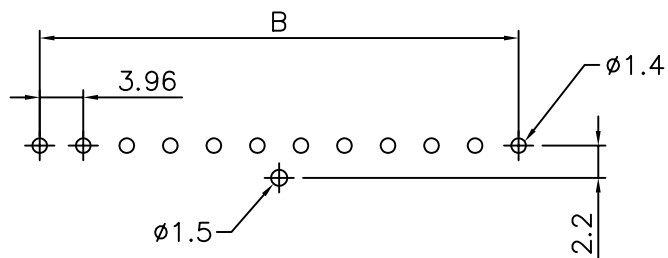

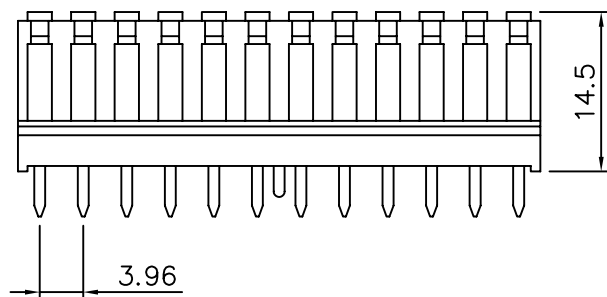


SPECIFICATIONS

Current Rating: 7A AC, DC
 Voltage Rating: 250V AC, DC
 Contact: Brass, Tin Plated
 Material: Nylon 66, UL94V-2, White
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 1,000 Megohms Min.
 Withstand Voltage: 1500V AC/Minute
 Applicable PC Board Thickness: 1.6mm

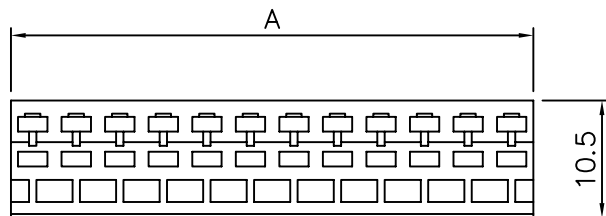

P.C.B Layout

Poles	A	B
6	23.80±0.20	19.80
12	47.50±0.40	43.56

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02222

APPROVED BY

MEI

CHECKED BY

SHIN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X 0.38

.XX 0.25


SCALE

NONE

REV.

B0

UNIT mm



NO. REV.

B0 NEW RELEASE REVISIONS

SHIN CHK

02/08/2007 DATE