



02301




02307


**△ SPECIFICATION**  
 Current Rating:5A AC/DC  
 Voltage Raing:300V AC/DC  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+90°C  
 Material:PA66(UL94V-2)  
 RoHS Compliant

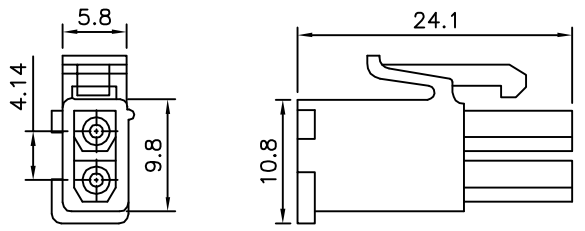


02302

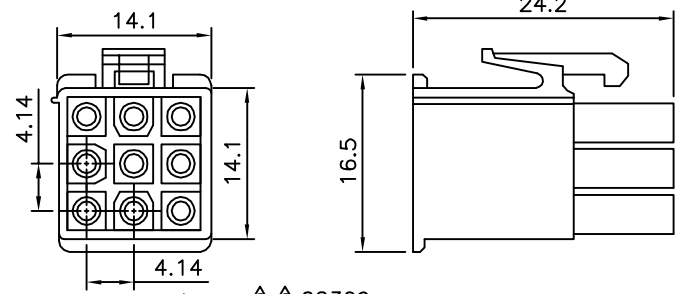


02309

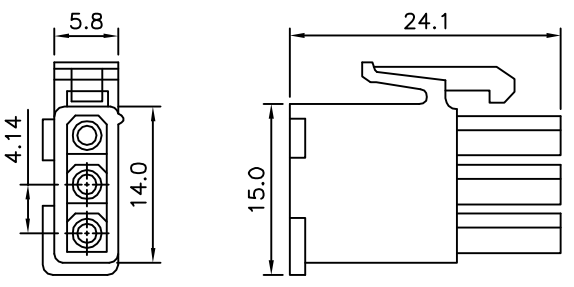


02303

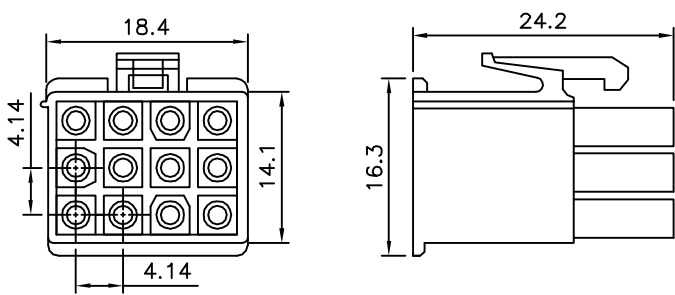

02308

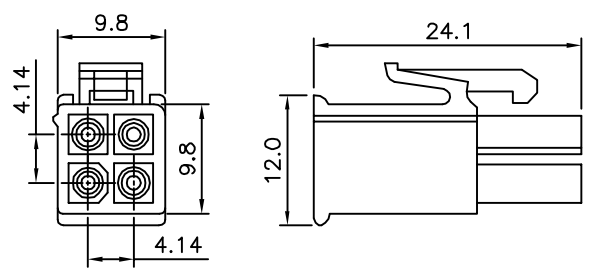

02306

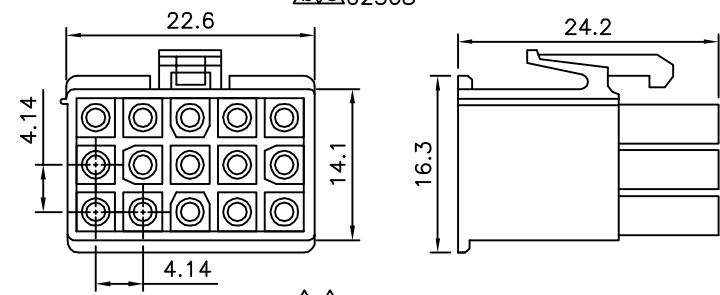

02305

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

|             |      |             |      |  |
|-------------|------|-------------|------|--|
| DRAWING No. |      | APPROVED BY |      | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br>△ .X ±0.3<br>.XX ±0.3<br>ANG. |
| 02306       |      | MEI         |      |  |
|             |      | CHECKED BY  | HZF  |  |
|             |      | DRAWING BY  | SONG |  |
| SCALE       | NONE | REV.        | A3   | UNIT mm  |

|          |             |     |            |
|----------|-------------|-----|------------|
| △ A3     | Modify Data | HZF | 09/13/2012 |
| △ A2     | Modify Data | HZF | 07/01/2011 |
| △ A1     | Modify Data | HZF | 11/11/2008 |
| △ A0     | NEW RELEASE |     |            |
| NO. REV. | REVISIONS   | CHK | DATE       |