




02301

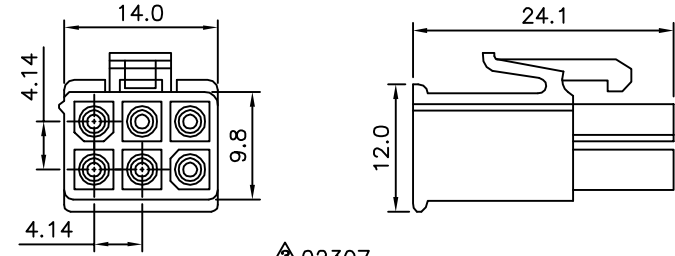


02307

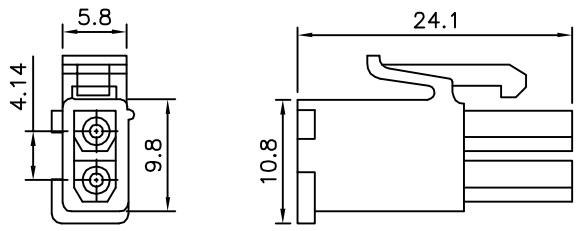


02302

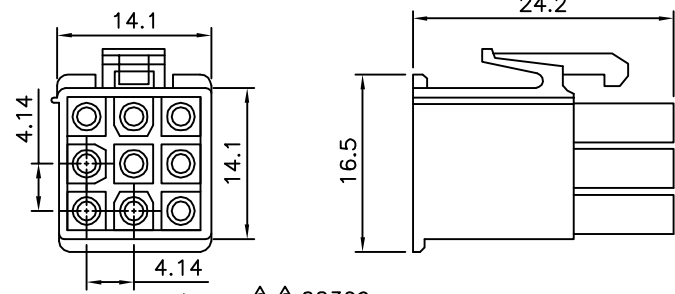


02309

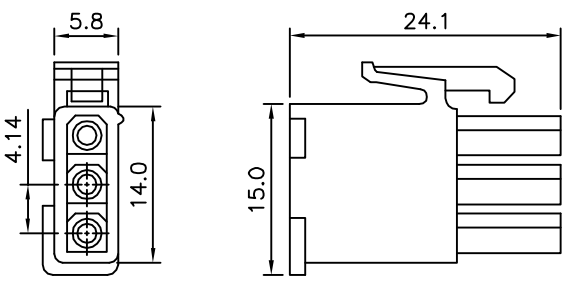


02303

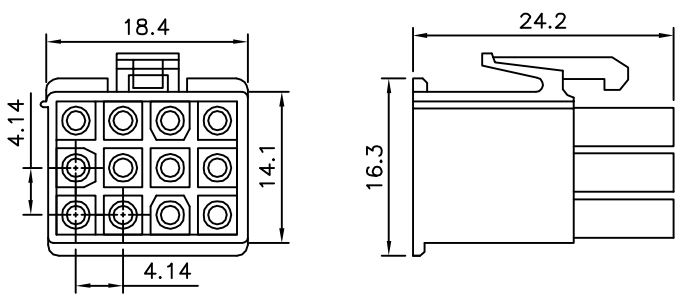

02308

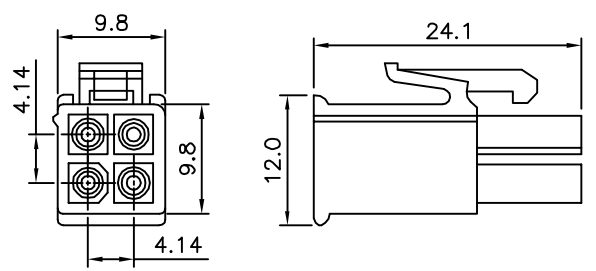

02306

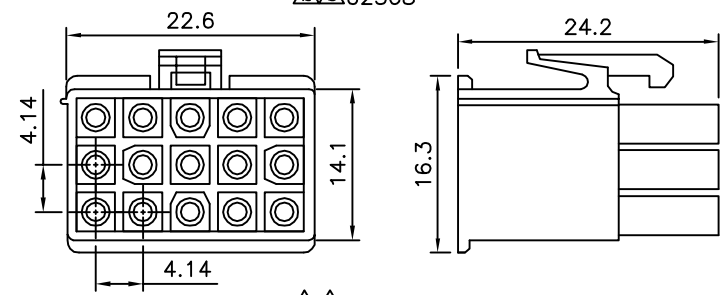

02305

**△ SPECIFICATION**

Current Rating:5A AC/DC  
 Voltage Raing:300V AC/DC  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+90°C  
 Material:PA66(UL94V-2)  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.3 .XX ±0.3 ANG.
02307		MEI		
		CHECKED BY	HZF	
		DRAWING BY	SONG	
SCALE	NONE	REV.	A3	UNIT mm

△ A3	Modify Data	HZF	09/13/2012
△ A2	Modify Data	HZF	07/01/2011
△ A1	Modify Data	HZF	11/11/2008
△ A0	NEW RELEASE		
NO. REV.	REVISIONS	CHK	DATE