




△△

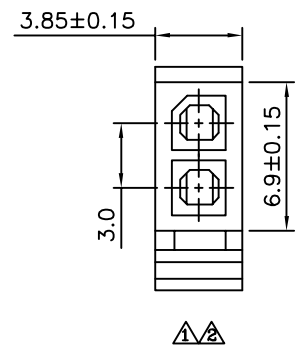


△△

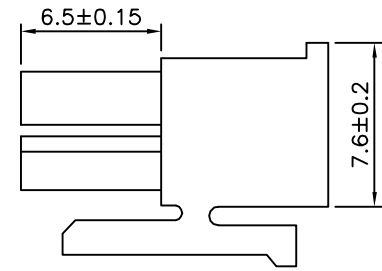

△ 02~04 Pin

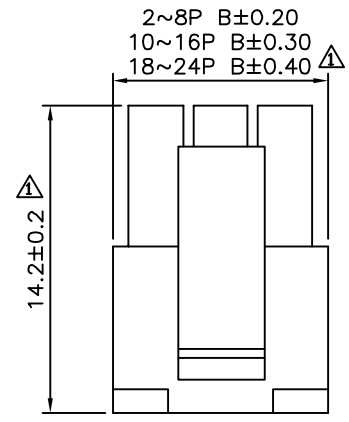

△

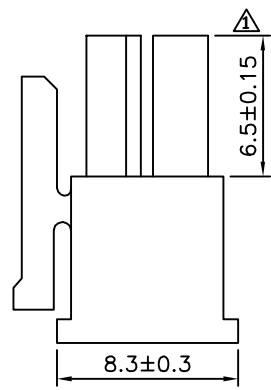

△ 06~24 Pin

△△ SPECIFICATION

- △ 1. General Characteristics
3.0mm Micro-Fit Receptacle Housing 2XXX
Black Insulator
- △ 2. Material & Finish
Housing: PA66(UL94V-0), Black
- △ 3. Electrical Characteristics
Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC
Insulation Resistance: 1000 Megaohms Min.
Withstand Voltage: 1500V AC/Minute
- △ 4. Environmental Characteristics
Temperature Range: -25°C ~ +85°C
- △ 5. RoHS Compliant

Pin	A	B
02	--	3.85
04	3.0	6.85
06	6.0	9.85
08	9.0	12.85
10	12.0	15.85
12	15.0	18.85
14	18.0	21.85
16	21.0	24.95
18	24.0	27.95
20	27.0	30.95
22	30.0	33.95
24	33.0	36.95

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 △ X ±0.25 .XX ±0.2 .XXX ±0.08
02600		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A3	NO. REV.

NO.	REV.	REVISIONS	CHK	DATE
△ A3		Modify Data	HZF	09/16/2014
△ A2		Modify Data	HZF	05/20/2013
△ A1		Modify Data	HZF	11/30/2009
△ A0		NEW RELEASE		