
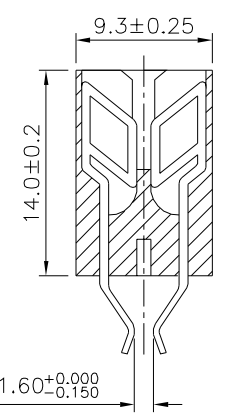
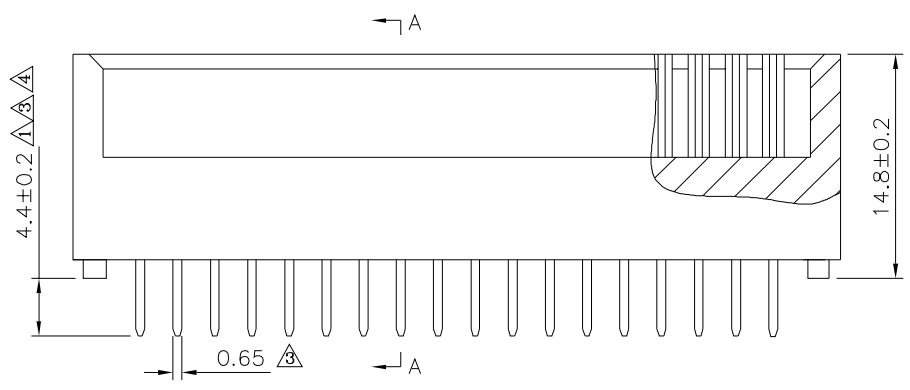


**⚠ SPECIFICATION**  
 Current Rating: 3A  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 5000 Megaohms Min. At 500V DC  
 Dielectric Withstand Volatge: 1000V AC/1 Minute  
**⚠** Operation Temperature: -55°C~+85°C  
 Insulator: PBT+G.F.(UL94V-0)  
 Contact: Brass, Gold Plated Over Nickel  
 RoHS Compliant

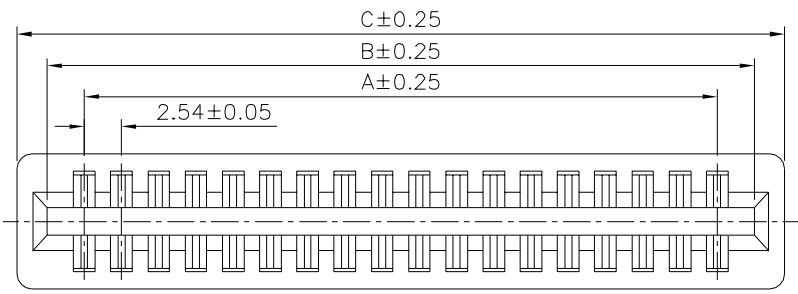

⚠ Section A-A

⚠

Pin	A	B	C	Pin	A	B	C
06	5.08	10.66	14.22	42	50.80	56.38	59.94
08	7.62	13.20	16.76	44	53.34	58.92	62.48
10	10.16	15.74	19.30	46	55.88	61.46	65.02
12	12.70	18.28	21.84	48	58.42	64.00	67.56
14	15.24	20.82	24.38	50	60.96	66.54	70.10
16	17.78	23.36	26.92	52	63.50	69.08	72.64
18	20.32	25.90	29.46	54	66.04	71.62	75.18
20	22.86	28.44	32.00	56	68.58	74.16	77.72
22	25.40	30.98	34.54	58	71.12	76.70	80.26
24	27.94	33.52	37.08	60	73.66	79.24	82.80
26	30.48	36.06	39.62	62	76.20	81.78	85.34
28	33.02	38.60	42.16	64	78.74	84.32	87.88
30	35.56	41.14	44.70	66	81.28	86.86	90.42
32	38.10	43.68	47.24	68	83.82	89.40	92.96
34	40.64	46.22	49.78	70	86.36	91.94	95.50
36	43.18	48.76	52.32	72	88.90	94.48	98.04
38	45.72	51.30	54.86	86	106.68	112.26	115.82
40	48.26	53.84	57.40	100	124.46	130.04	133.69

**4U CON** 元化興業股份有限公司  
 4U CON TECHNOLOGY INC.

DRAWING No. ⚠⚠  
 02850  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. B4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.  
 UNIT mm

⚠ B4	Modify Data	HZF	09/20/2020
⚠ B3	Modify Data	HZF	07/26/2018
⚠ B2	Modify Data	HZF	12/27/2010
⚠ B1	Modify Data	HZF	11/30/2010
⚠ B0	NEW RELEASE	BECKY	07/27/2006
NO. REV.	REVISIONS	CHK	DATE