

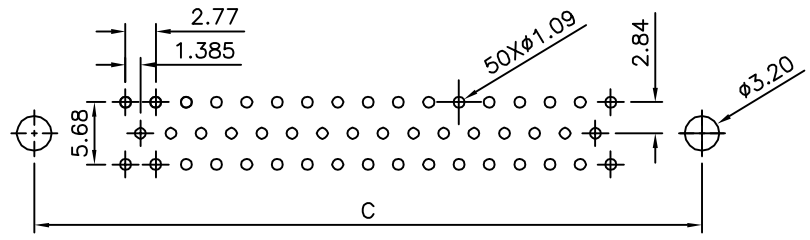
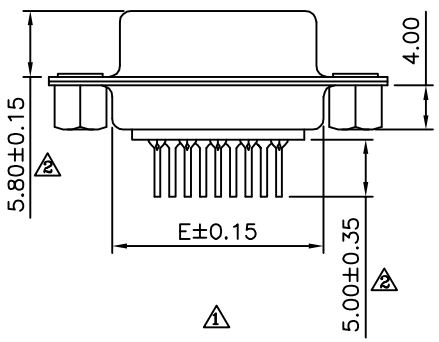


Recommended P.C.B. Layout


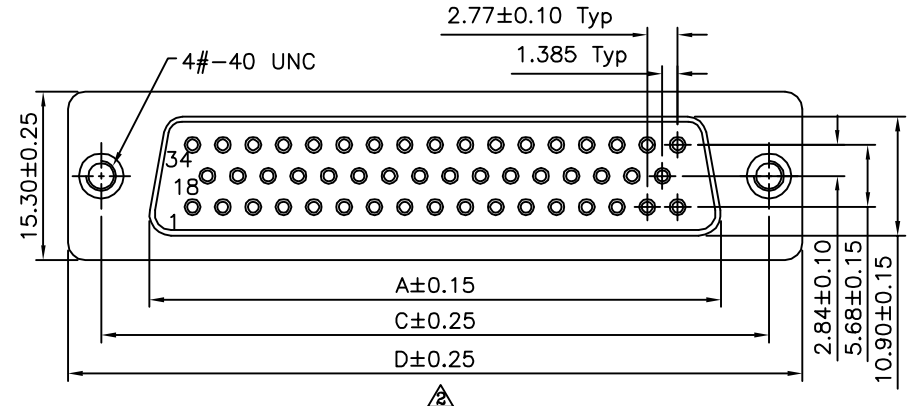


Recommended P.C.B. Layout


△△ SPECIFICATION
 Current Rating:5 Amps
 Withstanding Voltage:1000V(One Minute)
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-50°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 Shell:SPCC,Front:Nickel Plated,Rear:Tin Plated
 Nut:Copper Alloy,Nickel Plated
 RoHS Compliant

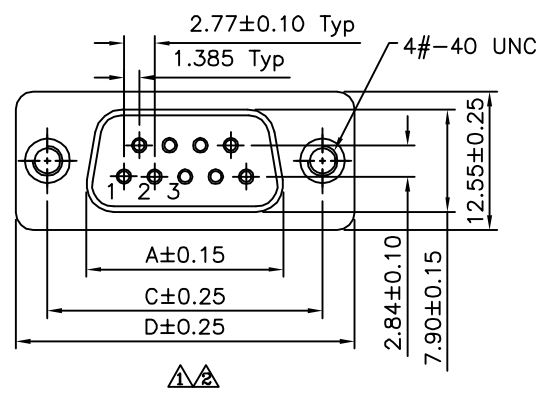

09,15,25,37 Pin

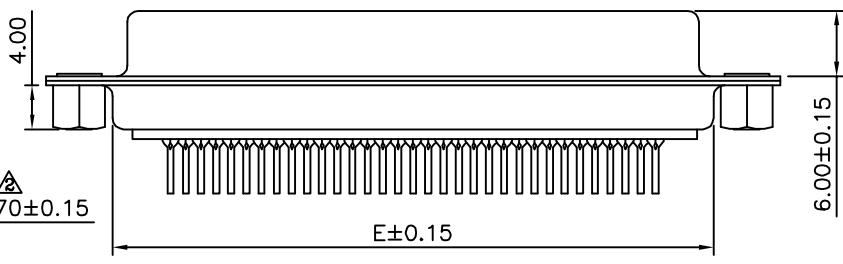

△ 50 Pin



Pin	A	C	D	E
09	16.33	24.99	30.81	19.20
15	24.80	33.32	39.20	27.70
25	38.38	47.04	53.04	41.10
37	54.84	63.50	69.40	57.30
50	52.20	61.00	67.00	55.10

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 02933
 APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY SONG
 SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.05 .XXX* ±0.5*
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	11/30/2011
△ A1		Modify Data	HZF	04/26/2011
△ A0		NEW RELEASE	HZF	07/28/2009